
PRODUCT NUMBER: 1578-2-00-15-00-00-03-0

www.mill-max.com
DATA SHEET

1578-X-XX-XX-00-00-03-0

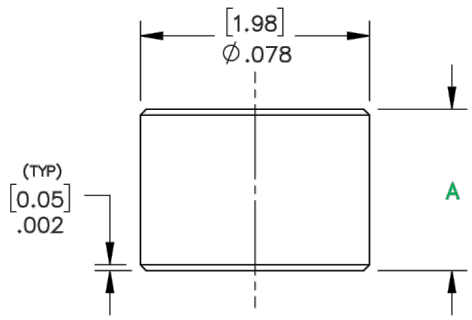

Basic Part Number	Target Disc Height (A)
1578-0	.025″ [0.64]
1578-1	.035″ [0.89]
1578-2	.045″ [1.14]
1578-3	.055″ [1.40]

Units: inch [mm]
Standard Tolerances:
Lengths: ± .005 [0.127]
Diameters: ± .002 [0.051]
Angles: ± 2°



General Information

1	**Product Lifecycle:**	Active
	Product Family:	Discrete Spring-Loaded Target Contacts
2	**Description:**	Target Disc for Spring-Loaded Pins
3	**Shell Material:**	Brass Alloy
4	**Shell Plating:**	15 : 10 µ" Gold over Nickel
5	**Operating Temperature Range:**	- 55/+125° C
	Country of Origin:	USA
6	**ROHS:**	Yes

Termination Style

Target Face Type:	Flat Face
Tail:	None
Tail Type:	No Tail
Head Type:	N/A
Hole Type:	N/A
Wire Termination:	N/A

1578-2-00-15-00-00-03-0 - SPECIFICATIONS

Key Dimensions	
Body Diameter:	.078" (1,981mm)
Flange Diameter:	.078" (1,981mm)
Flange Length:	.045" (1,143mm)
Overall Length:	.045" (1,143mm)

Electrical Specifications	
Maximum Current:	Application Specific

Mounting Specifications	
Mounting Feature:	Surface Mount
Mounting Hole Type:	Surface Mount
Alternate Mounting:	N/A
SMT Pad Size:	Circular - .088"

Packaging Information	
Packaging:	00 - Packaged in Bulk
Reel Size:	N/A


Environmental & Export Classifications	
REACH Status:	REACH Unaffected
ECCN:	Contact Factory
HTSUS:	8536.90.4000
Cage Code:	3N087
Moisture Sensitivity Level (MSL):	1 (Unlimited)
Special Handling Code:	UNDF
Prop 65:	N
Static Sensitive:	N

NOTES:


1. Part is Active and in Production, No Scheduled Obsolescence
2. Standard Tolerances:
   Lengths +/-.005" (0,13)
   Diameters: +/-.002" (0,051)
   Angles: +/- 2°
3. Brass Alloy 360 per ASTM B 16, or 385 per ASTM B455
4. GOLD per ASTM B 488, Type 1 (99.7% min. gold), Code C (130-200 HK {Knoop hardness}), NICKEL per ASTM B 689, Type 2 (Bright)
5. Per IEC 60512-11-(4,-9,-10,-12)
6. Mill-Max products labeled with the RoHS symbol are compliant with all three ROHS Directives. All of our products previously described as RoHS (2002/95/EC) and RoHS-2 (2011/65/EC) are also compliant with RoHS-3 (2015/863/EU).
7. Current Rating is typically a measured function of the female socket/connector. The amount of current a solid, male pin can tolerate is a direct relation of the heat displaced based on current and the ability of neighboring components to handle displaced heat.

ADDITIONAL PARTS, PACKAGING & ASSEMBLY INFO

Suggested P.C.B. Footprint



1578-X-57 Tape & Reel Details

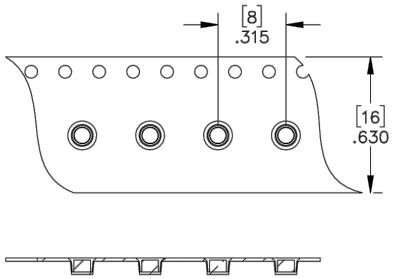

ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

RELATED LINKS AND DOCUMENTS

- Product Detail: 1578-2-00-15-00-00-03-0 - Spring-Loaded Target Contact with Flat Face
- Environmental Compliance: https://www.mill-max.com/rohs