
PRODUCT NUMBER: 806-22-001-30-014191

www.mill-max.com
DATA SHEET

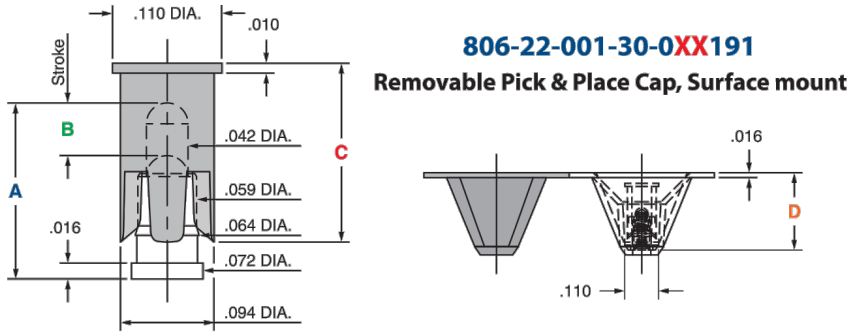

806-22-001-30-0XX191
Removable Pick & Place Cap, Surface mount

Contact Style	Initial Height (A)	Rated Travel	Full Stroke Range (B)	Sleeve Height (C)	Tape Depth (D)	Quantity per Reel
1	.137	.0195	.030-.039	.180	.252	780
2	.155	.0195	.030-.039	.180	.252	780
3	.177	.0275	.050-.055	.180	.252	780
4	.197	.0275	.050-.055	.180	.252	780
10	.217	.0275	.050-.055	.220	.285	750
11	.236	.0275	.050-.055	.220	.285	750
12	.255	.0275	.050-.055	.220	.361	550
13	.275	.0275	.050-.055	.220	.361	550
14	.295	.0275	.050-.055	.220	.361	550

General Information

1	**Product Lifecycle:**	Active
	Product Family:	Spring-Loaded Pins with Removable Pick and Place Cap
	Type:	Pin with Removable Pick and Place Cap
2	**Description:**	PCB Mount Spring-Loaded Header
	Description2:	Initial Pin Height .295" (7,49mm)
	Number of Pins:	1
	Head Type:	Plunger
	Tail Type:	N/A
3	**Operating Temperature Range:**	-55/+125° C
	Country of Origin:	USA
4	**ROHS:**	Yes

806-22-001-30-014191 - SPECIFICATIONS

Product Attributes	
Plating Code:	22 - Body/Plunger Plating: 20µ" Gold - Spring Plating: 10µ" Gold
Insulator Material:	Nylon 4/6
Rows:	Single Row
Frame Type:	N/A
5 Spring Number:	75 - Standard Force Beryllium Copper
Plunger Type:	Round
Stroke:	.055" (1,397mm)
Mid Stroke:	0.0275
Initial Pin Height:	.295" (7,493mm)
Mounting Tab:	N/A

Key Dimensions	
Above Board Height:	.295" (7,493mm)
Head Diameter:	.042" (1,067mm)
Initial Height:	.295" (7,493mm)
Insulator Height:	.220" (5,588mm)

Electrical Specifications	
6 Current Rating (Amps):	6.5 Amps
Contact Resistance:	20.00mΩ Max
Rated Voltage:	100 VRMS/150 VDC

Mechanical Specifications	
Mechanical life (Durability):	100,000 to 1,000,000 Cycles @ Mid-Stroke
7 Shock:	No Elect. Discontinuity > 1µs @ 50g
8 Vibration:	No Elect. Discontinuity > 1µs @ 10-2000HZ, 15 G

Mounting Specifications	
Mounting Type:	Surface Mount
Mounting Tab:	N/A
SMT Pad Size:	0.0820

Environmental & Export Classifications	
Cage Code:	3N087
ECCN:	Contact Factory
HTSUS:	8536.90.4040
Moisture Sensitivity Level (MSL):	1 (Unlimited)
Prop 65:	N
REACH Status:	REACH Unaffected
Special Handling Code:	UNDF
Static Sensitive:	N

Packaging Information	
9 **Packaging:**	Tape & Reel
Tape Width:	16mm
Quantity Per Reel:	550

NOTES:

1. Part is Active and in Production, No Scheduled Obsolescence
2. **Standard Tolerances**
   Assembly tolerance: +/-.010" (.25mm)
   Connector Length "L"

Connector Length "L"	Tolerance
L ≤ 2" (L ≤ 50.8 mm)	+/- .005" (+/- .127 mm)
2< L ≤ 3" (50.8 < L ≤ 76.2 mm)	+ .007/ - .006" (+ .178/ -.152 mm)
3< L ≤ 4" (76.2 < L ≤ 101.6 mm)	+ .009 / - .007" (+ .229 / - .178 mm)
4< L ≤ 5" (101.6 < L ≤ 127 mm)	+ .011 / - .008" (+ .279 / - .203 mm)
5< L ≤ 6.4" (127 < L ≤ 162.56 mm)	+ .013 / - .009" (+ .330 / - .229 mm)

   Insulator width: +/-.005 (.13mm)
   Insulator height: +/-.005 (.13mm)
   Co-planarity of SMT connectors: .005" (.13mm) up to 1" (25.4mm) in connector length
   Insulator Flatness: .005" (.13mm) up to 1" (25.4mm) in connector length
   Pin Length: +/-.006 (.15mm)
   Pin Diameter: +/-.002 (.051mm)
   Pin Angle: +/-2°
3. Per IEC 60512-11-(4,-9,-10,-12)
4. Mill-Max products labeled with the RoHS symbol are compliant with all three ROHS Directives. All of our products previously described as RoHS (2002/95/EC) and RoHS-2 (2011/65/EC) are also compliant with RoHS-3 (2015/863/EU).
5. Click the Link for Force vs. Travel and Current-Temperature Derating Curve
6. Maximum Current Per Pin = 6.5A @ 30˚ C Temp. Rise
7. For discrete pin only. Per IEC 60512-6-3: Test 6c: Shock
8. For discrete pin only. Per IEC 60512-6-4: Test 6d: Vibration (sinusoidal)
9. 13" (330 mm) Reel

ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

RELATED LINKS AND DOCUMENTS

- Product Detail: 806-22-001-30-014191 - Spring-Loaded Header
- Engineering Notebook: **Introduction to Spring-Loaded Pogo Pins & Connectors**
- Environmental Compliance: https://www.mill-max.com/rohs