




PRODUCT NUMBER: 8301-2-24-21-00-00-01-0

www.mill-max.com  
DATA SHEET

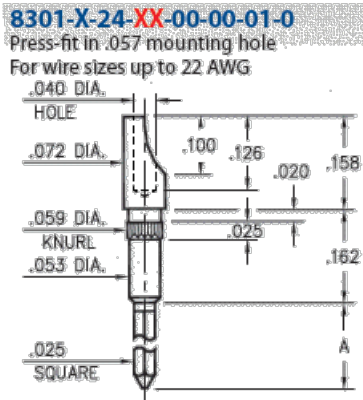

| Basic Part Number | # of Wraps | Length A |
|-------------------|------------|----------|
| 8301-2            | 2          | .370     |
| 8301-3            | 3          | .510     |



General Information

|   |                              |                                 |
|---|------------------------------|---------------------------------|
| 1 | Product Lifecycle:           | Active                          |
|   | Product Family:              | Printed Circuit Board (PCB) Pin |
| 2 | Description:                 | Solder Cup Terminal Pin         |
| 3 | Shell Material:              | Brass Alloy                     |
| 4 | Shell Plating:               | 21: 20 μ" Gold over Nickel      |
| 5 | Operating Temperature Range: | - 55/+125° C                    |
|   | Country of Origin:           | USA                             |
| 6 | ROHS:                        | Yes                             |

Termination Style

|                   |                        |
|-------------------|------------------------|
| Tail:             | Single                 |
| Tail Type:        | Wire-Wrap              |
| Head Type:        | Solder Cup             |
| Hole Type:        | Closed-Bottom          |
| Wire Termination: | Soldercup up to 22 AWG |

8301-2-24-21-00-00-01-0 - SPECIFICATIONS

| Key Dimensions       |                  |
|----------------------|------------------|
| Barb/Knurl Diameter: | .059" (1,499mm)  |
| Body Diameter:       | .053" (1,346mm)  |
| Body Length:         | .162" (4,115mm)  |
| Head Diameter:       | .072" (1,829mm)  |
| Hole Depth:          | .126" (3,200mm)  |
| Overall Length:      | .690" (17,526mm) |
| Tail Diameter:       | .025" (0,635mm)  |
| Tail Length:         | .370" (9,398mm)  |

| Electrical Specifications |                      |
|---------------------------|----------------------|
| 7 Maximum Current:        | Application Specific |

| Mounting Specifications |                                                              |
|-------------------------|--------------------------------------------------------------|
| Mounting Feature:       | Press-Fit into a Non-Plated Through Hole (NPTH) or Insulator |
| Mounting Hole Type:     | Non-Plated Through Hole (NPTH)                               |
| Mounting Hole:          | .057" (1,448mm)                                              |
| Alternate Mounting:     | N/A                                                          |
| SMT Pad Size:           | N/A                                                          |

| Packaging Information |                       |
|-----------------------|-----------------------|
| Packaging:            | 24 - Packaged in Bulk |
| Reel Size:            | N/A                   |

| Environmental & Export Classifications |                  |
|----------------------------------------|------------------|
| REACH Status:                          | REACH Unaffected |
| ECCN:                                  | Contact Factory  |
| HTSUS:                                 | 8536.90.4000     |
| Cage Code:                             | 3N087            |
| Moisture Sensitivity Level (MSL):      | 1 (Unlimited)    |
| Special Handling Code:                 | UNDF             |
| Prop 65:                               | N                |
| Static Sensitive:                      | N                |

## NOTES:

1. Part is Active and in Production, No Scheduled Obsolescence
2. Standard Tolerances:  
Lengths  $\pm 0.005$ " (0,13)  
Diameters:  $\pm 0.002$ " (0,051)  
Angles:  $\pm 2^\circ$
3. Brass Alloy 360 per ASTM B 16, or 385 per ASTM B455
4. GOLD per ASTM B 488, Type 1 (99.7% min. gold), Code C (130-200 HK {Knoop hardness}); NICKEL per ASTM B 689, Type 2 (Bright)
5. Per IEC 60512-11-(4,-9,-10,-12)
6. Mill-Max products labeled with the RoHS symbol are compliant with all three ROHS Directives. All of our products previously described as RoHS (2002/95/EC) and RoHS-2 (2011/65/EC) are also compliant with RoHS-3 (2015/863/EU).
7. Current Rating is typically a measured function of the female socket/connector. The amount of current a solid, male pin can tolerate is a direct relation of the heat displaced based on current and the ability of neighboring components to handle displaced heat.

## ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

## RELATED LINKS AND DOCUMENTS

- Product Detail: [8301-2-24-21-00-00-01-0 - Solder Cup Terminal Pin](#)
- [Application Note - Pins Receptacles & Connectors with Solder Cups](#)
- Engineering Notebook: [Introduction to Printed Circuit Board PCB Pins](#)
- Environmental Compliance: <https://www.mill-max.com/rohs>