

# APPLICATION NOTES

## Application Note for Mill-Max 0508-0-00-XX-00-00-03-0

MM pin 0508 is often used either as a single interconnect or in an array that is surface mount assembled onto a SMT PCB land (Fig.1). For superior board retention, the .035" (0,89mm) diameter base can be set into a blind via. (Figs.2 and 3)

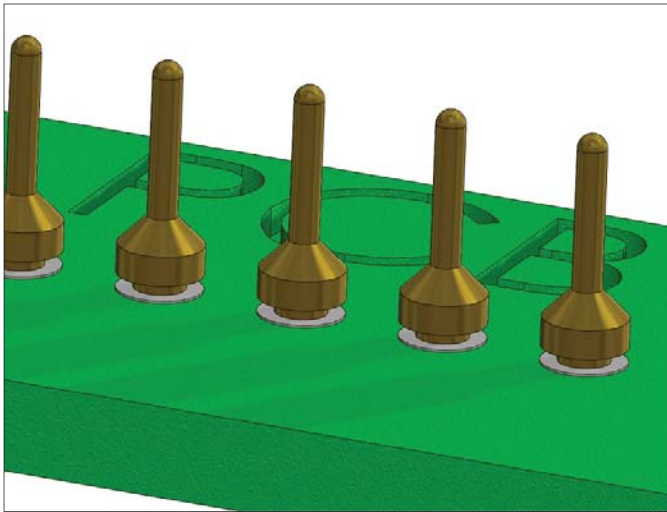


Figure 1:  
MM 0508 Surface Mount Soldered on PCB

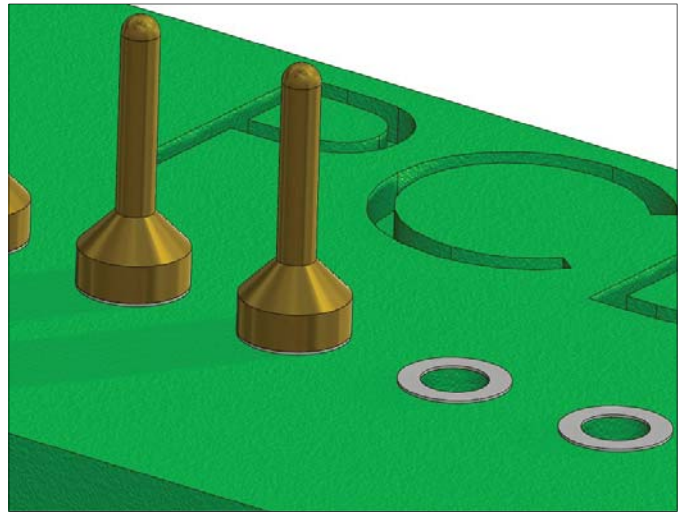


Figure 2:  
MM 0508 Soldered Into Blind Via Holes on PCB

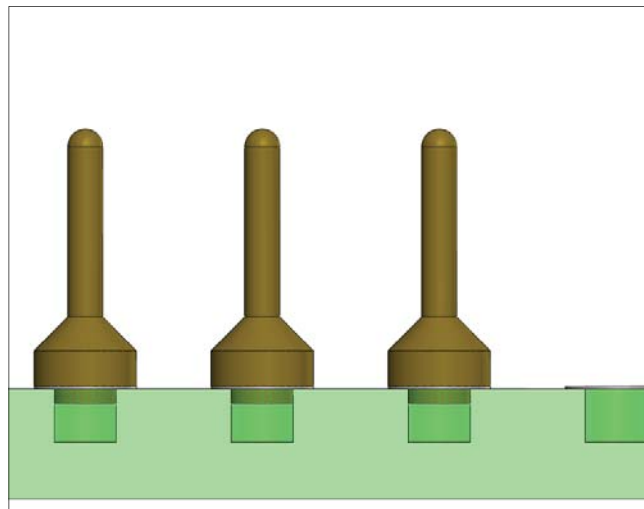


Figure 3:  
MM 0508 Soldered Into Blind Via Holes on PCB

