


DUAL-IN-LINE INSULATORS STANDARD OPEN FRAME

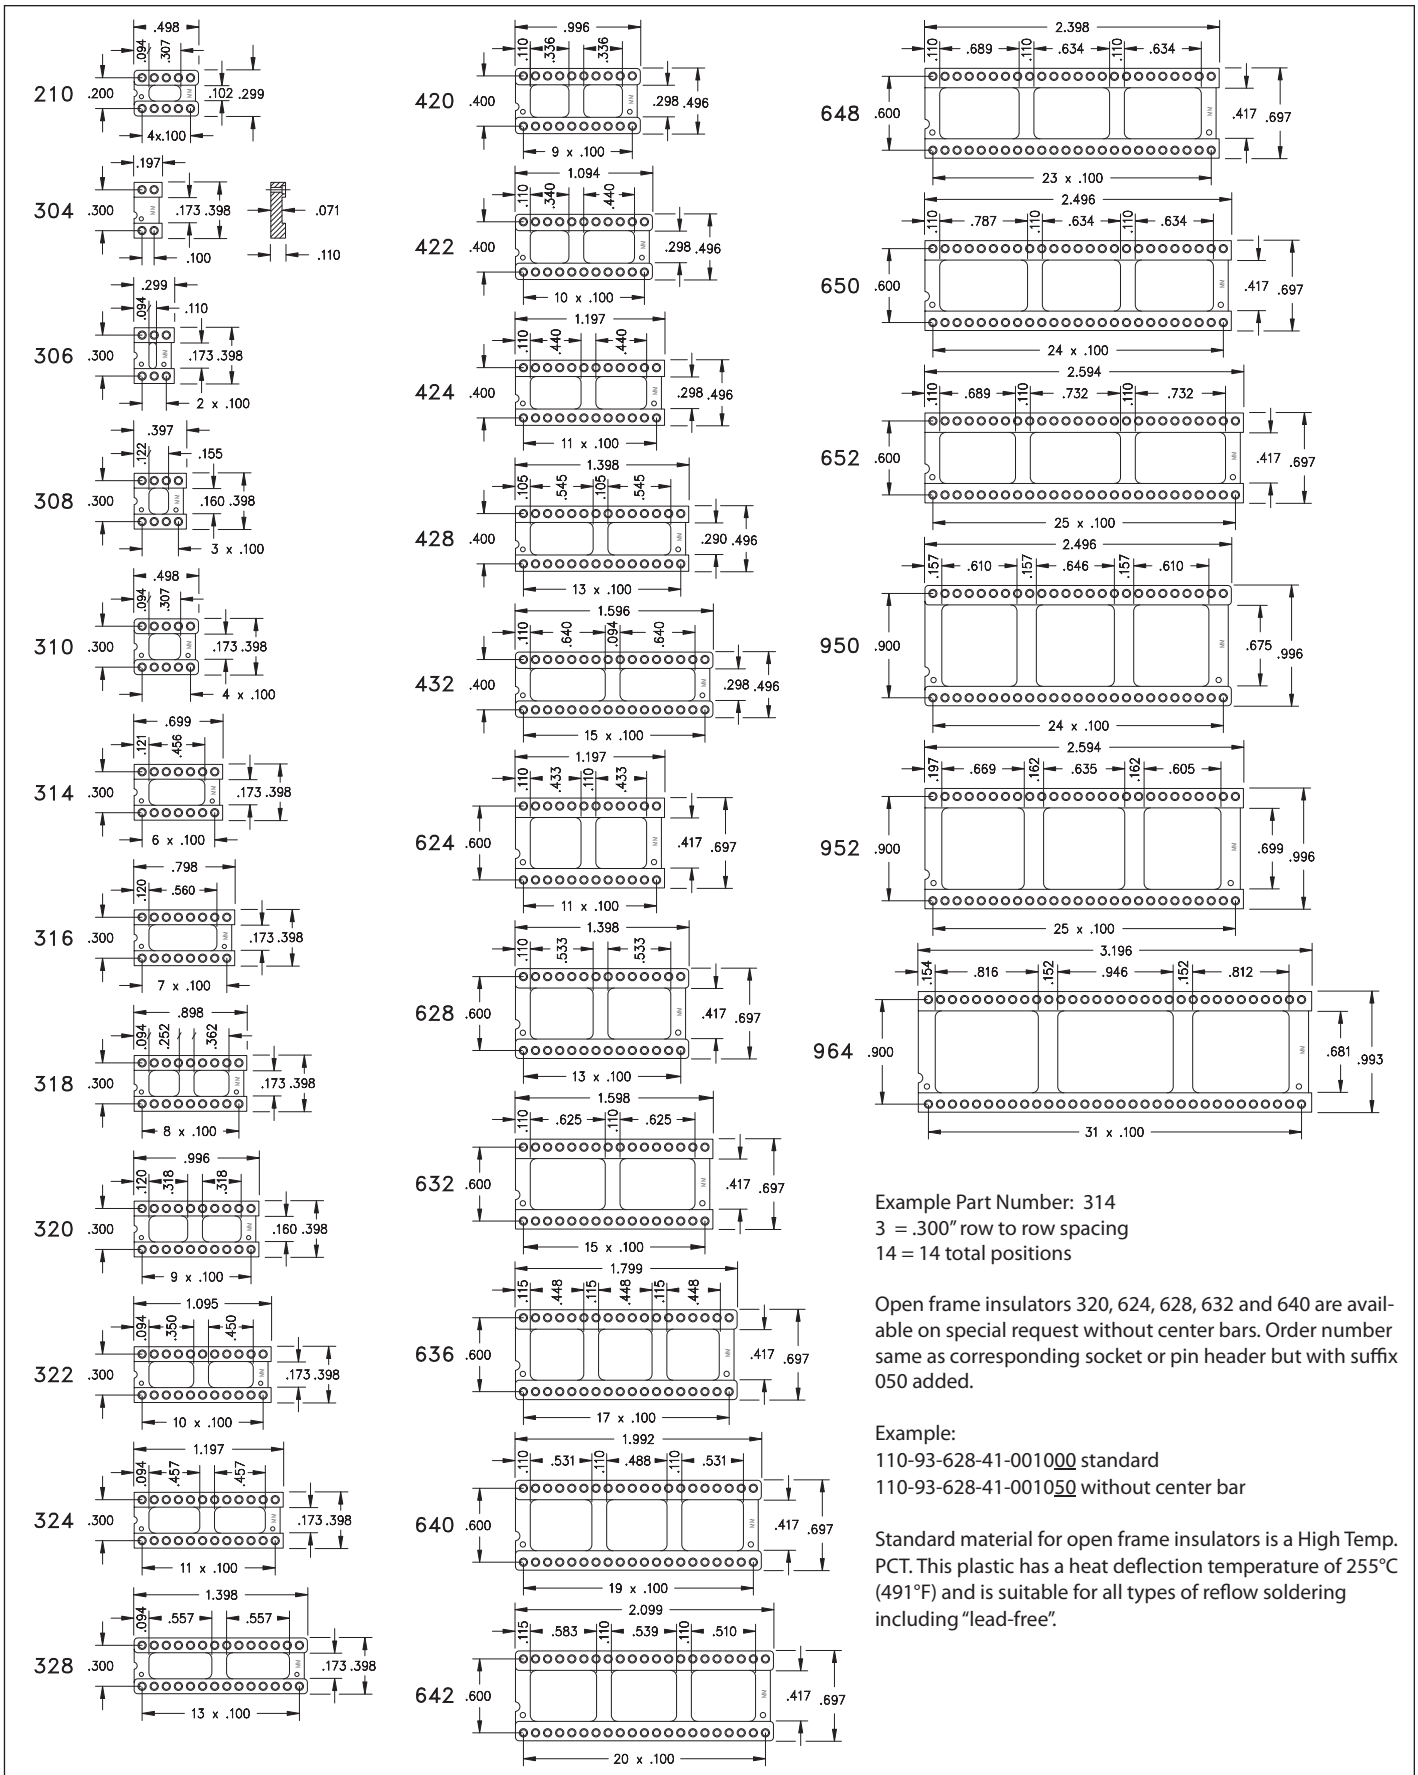

Example Part Number: 314

3 = .300" row to row spacing

14 = 14 total positions

Open frame insulators 320, 624, 628, 632 and 640 are available on special request without center bars. Order number same as corresponding socket or pin header but with suffix 050 added.

Example:


110-93-628-41-001000 standard

110-93-628-41-001050 without center bar

Standard material for open frame insulators is a High Temp. PCT. This plastic has a heat deflection temperature of 255°C (491°F) and is suitable for all types of reflow soldering including "lead-free".



DUAL-IN-LINE INSULATORS STANDARD OPEN FRAME

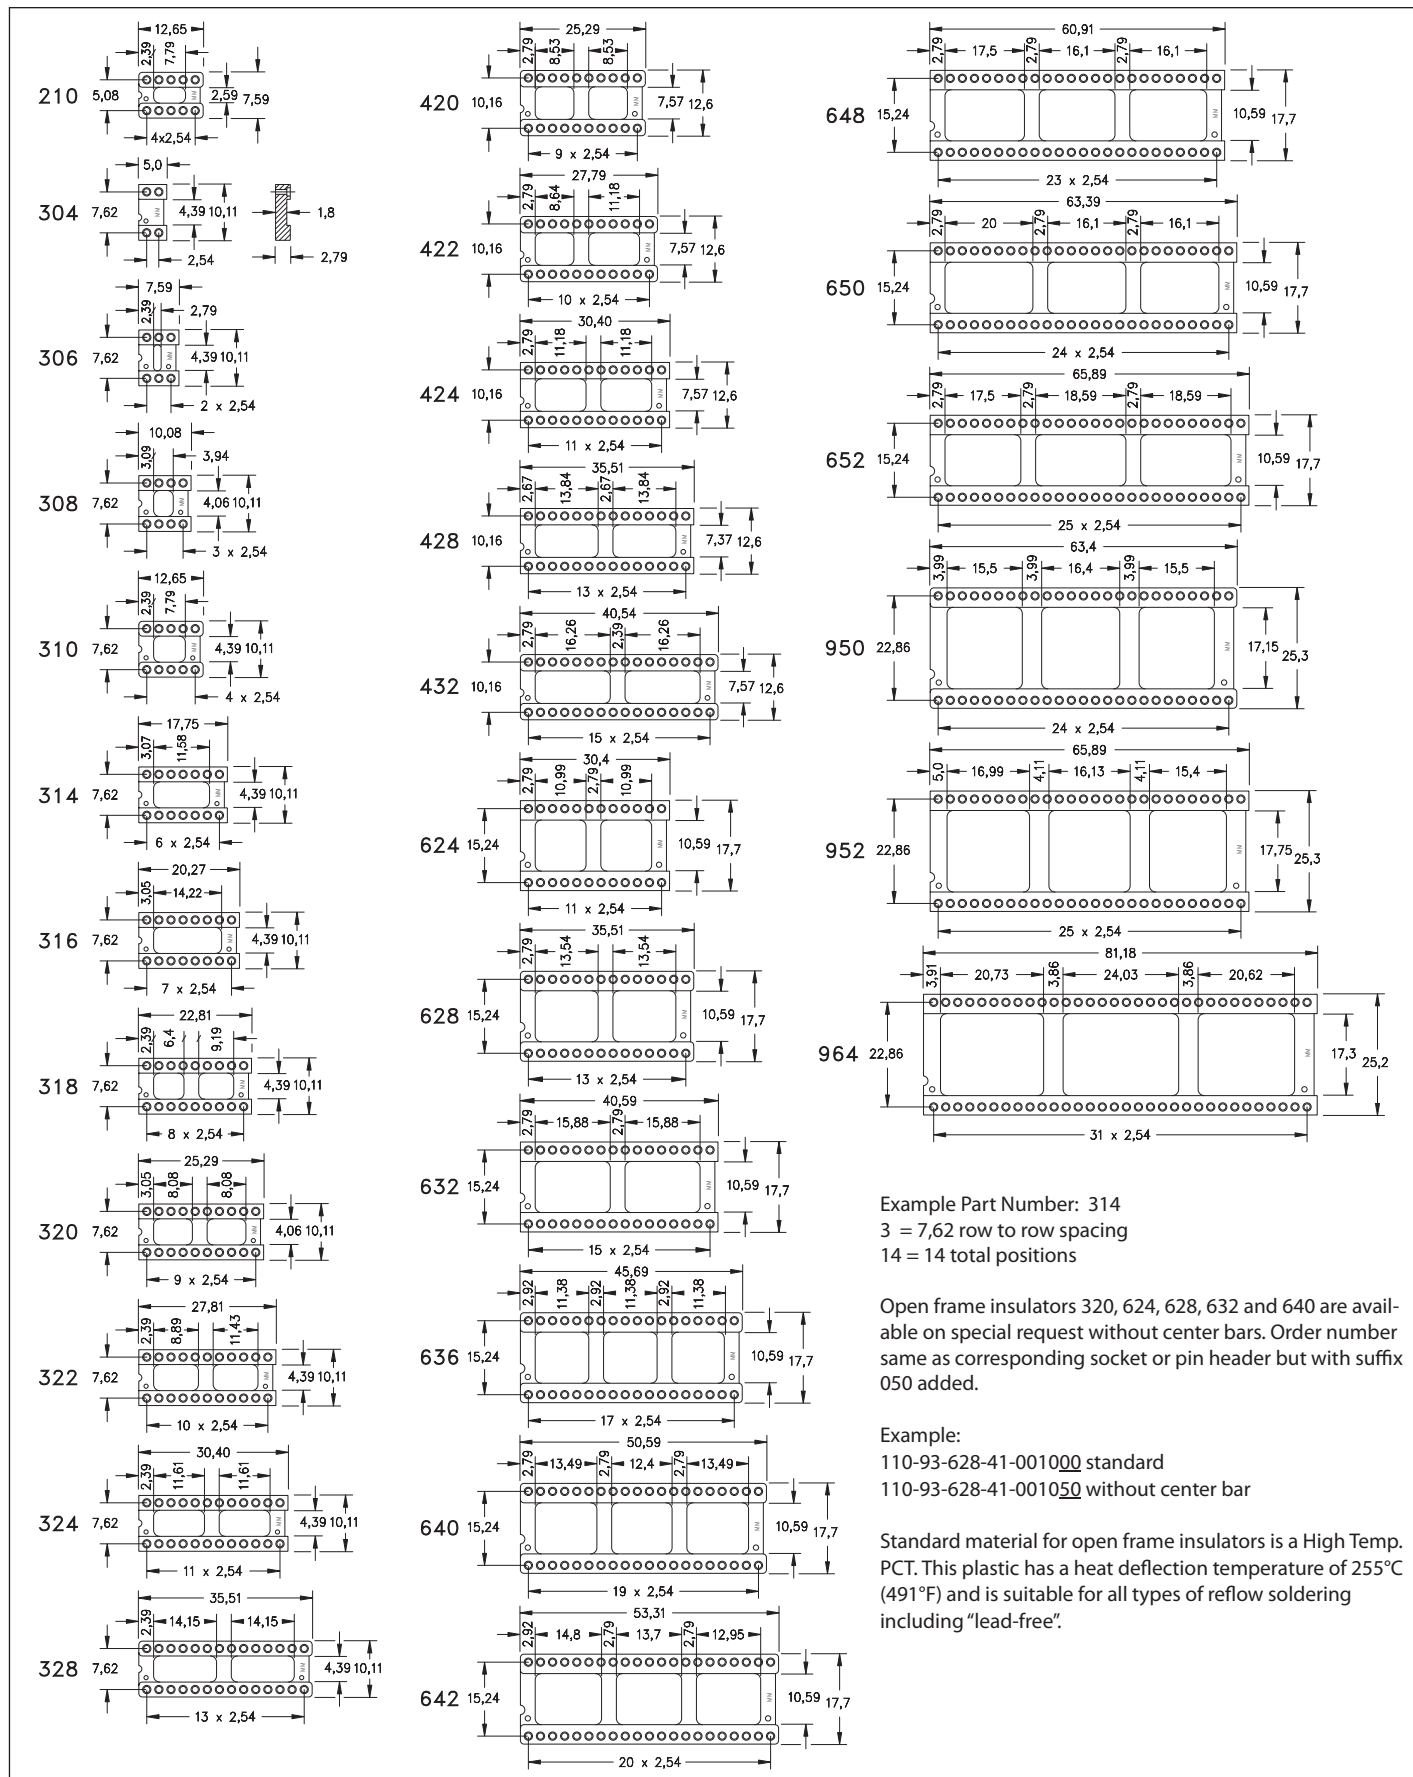

Example Part Number: 314

3 = 7,62 row to row spacing

14 = 14 total positions

Open frame insulators 320, 624, 628, 632 and 640 are available on special request without center bars. Order number same as corresponding socket or pin header but with suffix 050 added.

Example:

110-93-628-41-001000 standard

110-93-628-41-001050 without center bar

Standard material for open frame insulators is a High Temp. PCT. This plastic has a heat deflection temperature of 255°C (491°F) and is suitable for all types of reflow soldering including "lead-free".

