

SPRING-LOADED CONNECTORS

SERIES 319, 399 • 2,54 GRID CONCAVE FACE TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • SINGLE ROW STRIPS



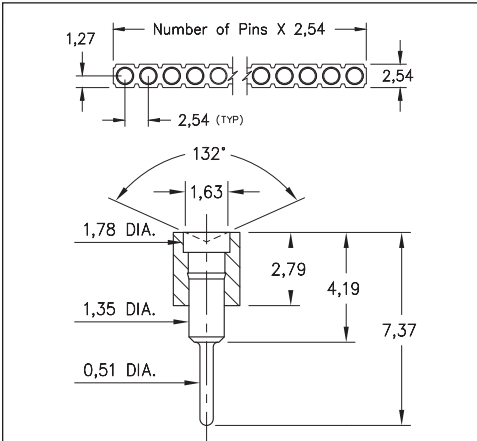


FIG. 1

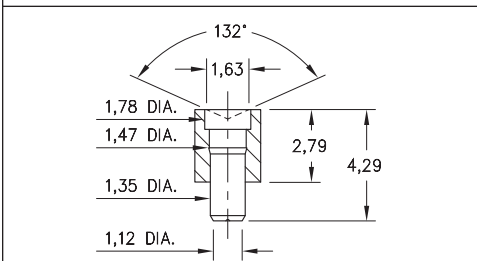

Coplanarity 0,13. For Pin counts >10 positions, consult Technical Support.

FIG. 2

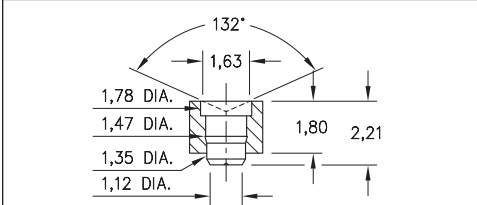

Coplanarity 0,13. For Pin counts >10 positions, consult Technical Support.

FIG. 3


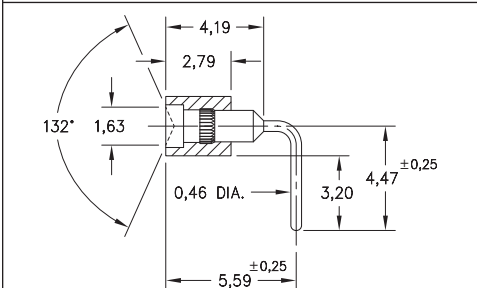


FIG. 4

- Series 319 and 399 Spring Target Connectors, supplied in single row strips. Available in SMT and right angle through-hole termination configurations
- Target Connectors provide an excellent gold-plated conductive mating surface for spring loaded connectors. These series are offered with a concave face for making contact with our standard 1,07 dia. spring pin plungers
- Target connectors use MM #1948, #1955, #1957 and #1960 pins. See pages 223.1, 223.2 and 223.3 for details
- Insulators are high temperature thermoplastic

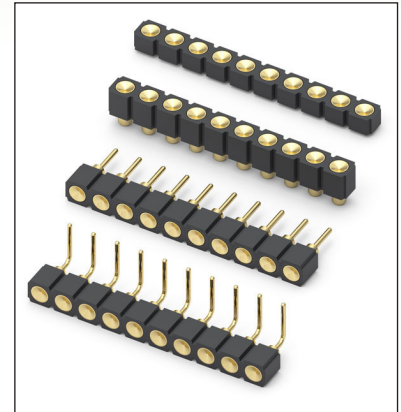

ORDERING INFORMATION

	Series 319...006	Standard Solder Tails
FIG. 1	319-10-1	-00-006000
	Specify number of pins	01-64
	Series 319...007	Surface Mount
FIG. 2	319-10-1	-30-007000
	Specify number of pins	01-64
	Series 319...055	Low Profile Surface Mount
FIG. 3	319-10-1	-30-055000
	Specify number of pins	01-64
	Series 399...007	Right Angle Solder Tails
FIG. 4	399-10-1	-10-007000
	Specify number of pins	01-64



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=	10			
Pin Plating		0,25µm Au		

