




PRODUCT NUMBER: 847-22-006-30-011101

www.mill-max.com  
DATA SHEET

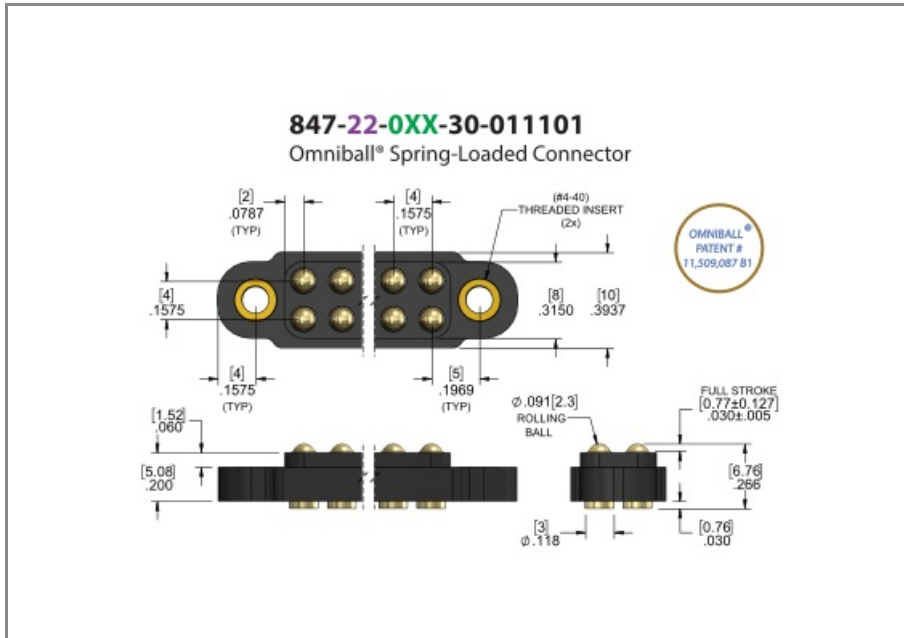

General Information	
1 Product Lifecycle:	Active
Product Family:	Spring-Loaded Connector
Type:	Omniball® Pogo Pin Header Strip
2 Description:	PCB Mount Spring-Loaded Header
Description2:	Rugged Vertical Mount SMT
Pitch:	.158" (4,001mm)
Number of Pins:	6
Head Type:	Plunger
3 Operating Temperature Range:	-55/+125° C
Country of Origin:	USA
4 ROHS:	Yes

## 847-22-006-30-011101 - SPECIFICATIONS

Product Attributes	
Plating Code:	22 - Body/Plunger Plating: 20μ" Gold - Spring Plating: 10μ" Gold
Insulator Material:	Nylon 4/6
Rows:	Double Row
Frame Type:	N/A
5 Spring Number:	09 - Standard Force Beryllium Copper (Click For Graphs)
Plunger Type:	OmniBall®
Stroke:	.030" (0,762mm)
Mid Stroke:	0.015

Key Dimensions	
Head Diameter:	.091" (2,311mm)
Initial Height:	.266" (6,756mm)
Insulator Height:	.200" (5,080mm)

Electrical Specifications	
Contact Resistance:	30.00mΩ Max
Insulation Resistance:	10,000 MΩ min.
Rated Voltage:	100 VRMS/150 VDC
Dielectric Withstanding Voltage:	1,000 VRMS min.

Mechanical Specifications	
Mechanical life (Durability):	100,000 to 1,000,000 Cycles @ Mid-Stroke
6 Shock:	No Elect. Discontinuity > 1μs @ 50g
7 Vibration:	No Elect. Discontinuity > 1μs @ 10-2000HZ, 15 G

Mounting Specifications	
Mounting Type:	Mounting Tabs with 4-40 Threaded Inserts

**Environmental & Export Classifications**

<b>Cage Code:</b>	3N087
<b>ECCN:</b>	Contact Factory
<b>HTSUS:</b>	8536.90.4040
<b>Moisture Sensitivity Level (MSL):</b>	1 (Unlimited)
<b>Prop 65:</b>	N
<b>REACH Status:</b>	REACH Unaffected
<b>Special Handling Code:</b>	UNDF
<b>Static Sensitive:</b>	N

**Packaging Information**

<b>8 Packaging:</b>	Packaged in Box or Tube
<b>Tape Width:</b>	N/A
<b>Quantity Per Tube:</b>	19



## ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

## RELATED LINKS AND DOCUMENTS

- Product Detail: [847-22-006-30-011101 - PCB Mount Spring-Loaded Header](#)
- Engineering Notebook: [Introduction to Omniball® Spring-Loaded Contacts and Connectors](#)
- Environmental Compliance: <https://www.mill-max.com/rohs>