



WWW.MILL-MAX.COM

# MALE PCB PINS





WWW.MILL-MAX.COM

**MILL-MAX PRINTED CIRCUIT PINS ARE MACHINED INDIVIDUAL PINS USED FOR VARIOUS PLUG-IN APPLICATIONS AND ARE FUNCTIONALLY THE DYNAMIC BUILDING BLOCKS WITHIN AN INTERCONNECT SYSTEM.**

Mill-Max offers a variety of pins in a broad range of diameters as well as turret, slotted, bifurcated (forked), soldercup and wrapost style pins. They are commonly fastened to printed circuit boards or other housings by being press-fit, swaged (riveted) or soldered.

PCB pins serve not only as a conductive path for an electrical circuit, but provide strength to an assembly module as a mechanical interface. Mill-Max Mfg. Corp. has developed thousands of state-of-the-art "basic pin" designs, featuring pin barrel geometries for our customers who require outside-the-box solutions to their interconnect needs.

In addition to the products found on the following pages, Mill-Max offers the following stock materials and diameters available for manufacture:




**BRASS Alloy 360, 1/2 hard:** 1,57/1,83/1,98/2,36/3,18/3,96/4,75/6,35 diameters

**PHOSPHOR BRONZE Alloy 544:** 1,57/1,83/1,98 diameters

**TELLURIUM COPPER Alloy 145:** 2,01/2,36/3,18/3,96 diameters

Mill-Max will gladly quote application specific products. Please complete the specification sheet on page **247** or send us your own drawings.













We assure you a fast response.

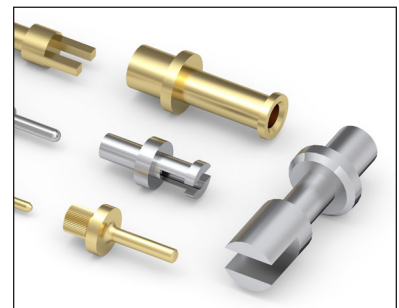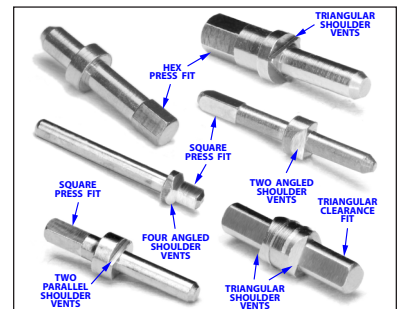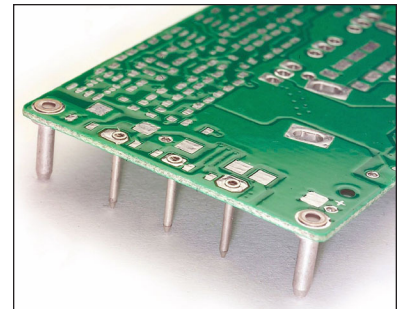



# MALE PCB PINS

## PRINTED CIRCUIT PINS • NAIL HEAD TYPE
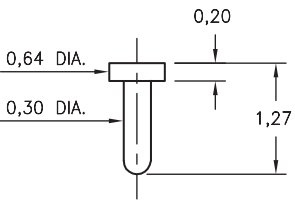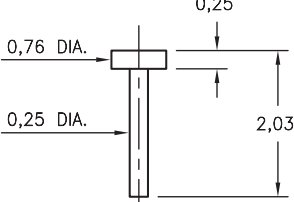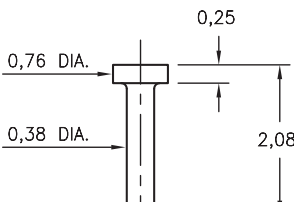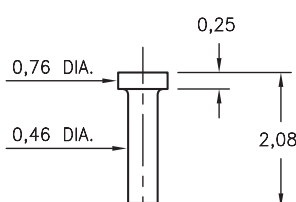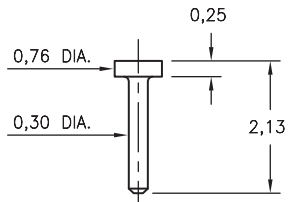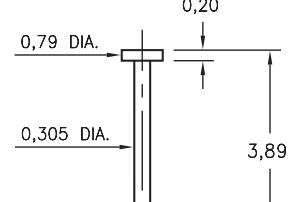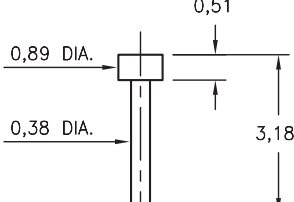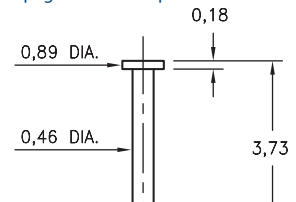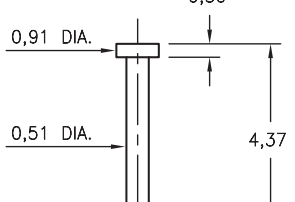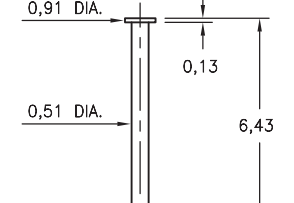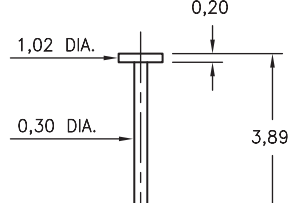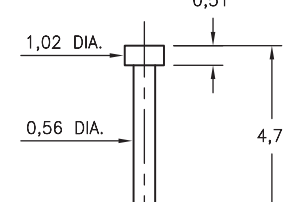
<p><b>9050</b> 9050-0-00-XX-00-00-33-0 Solder mount in 0,41 mounting hole</p> 	<p><b>4184</b> 4184-0-00-XX-00-00-33-0 Solder mount in 0,36 mounting hole</p> 	<p><b>4825</b> 4825-0-00-XX-00-00-33-0 Solder mount in 0,48 mounting hole Also available on 16mm wide carrier tape: 3,250 parts per 330mm reel. See page 224.1 for Tape &amp; Reel details</p> 	<p><b>4288</b> 4288-0-00-XX-00-00-33-0 Solder mount in 0,56 mounting hole Also available on 16mm wide carrier tape: 3,250 parts per 330mm reel. See page 224.1 for Tape &amp; Reel details</p> 
<p><b>4353</b> 4353-0-00-XX-00-00-33-0 Solder mount in 0,41 mounting hole Also available on 16mm wide carrier tape: 3,040 parts per 330mm reel. See page 224.1 for Tape &amp; Reel details</p> 	<p><b>6083</b> 6083-0-00-XX-00-00-03-0 Solder mount in 0,41 mounting hole</p> 	<p><b>4689</b> 4689-0-00-XX-00-00-33-0 Solder mount in 0,48 mounting hole</p> 	<p><b>4068</b> 4068-0-00-XX-00-00-33-0 Solder mount in 0,56 mounting hole Also available on 16mm wide carrier tape: 2,000 parts per 330mm reel. See page 224.1 for Tape &amp; Reel details</p> 
<p><b>5063</b> 5063-0-00-XX-00-00-33-0 Solder mount in 0,61 mounting hole</p> 	<p><b>6547</b> 6547-0-00-XX-00-00-33-0 Solder mount in 0,61 mounting hole Also available on 24mm wide carrier tape: 1,080 parts per 330mm reel. See page 224.1 for Tape &amp; Reel details</p> 	<p><b>9083</b> 9083-0-00-XX-00-00-38-0 Solder mount in 0,41 mounting hole Also available on 16mm wide carrier tape: 1,950 parts per 330mm reel. See page 224.1 for Tape &amp; Reel details</p> 	<p><b>9185</b> 9185-0-00-XX-00-00-33-0 Solder mount in 0,67 mounting hole</p> 

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - X - 00 - XX - 00 - 00 - XX - 0

**BASIC PART #**













**SPECIFY PIN FINISH:**

- 01** 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ **80** 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ **15** 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ **21** 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ **34** 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)



# MALE PCB PINS

## PRINTED CIRCUIT PINS • NAIL HEAD TYPE
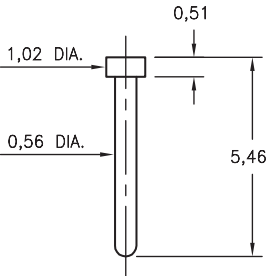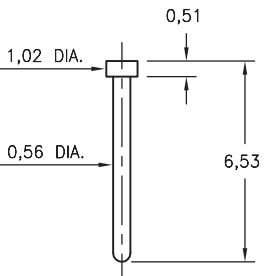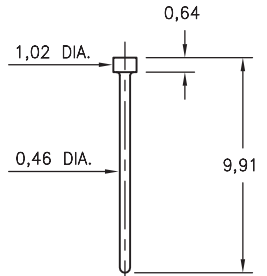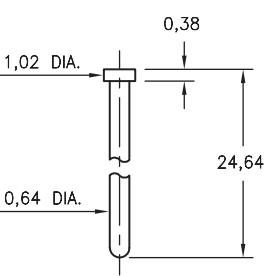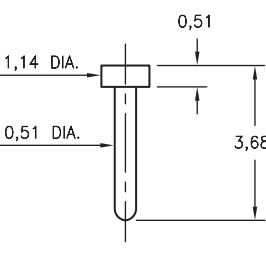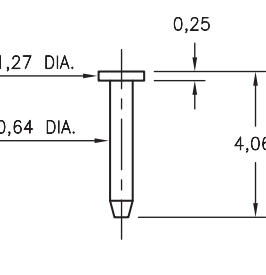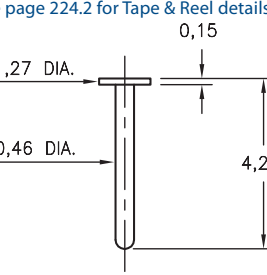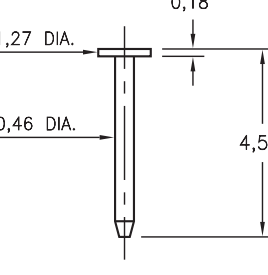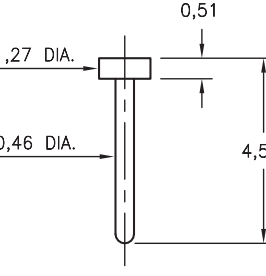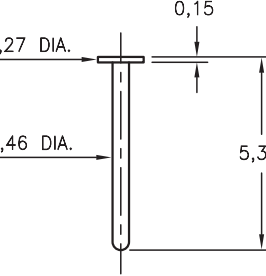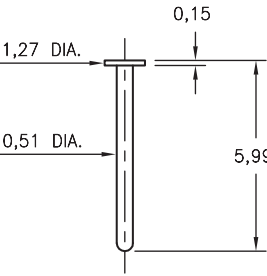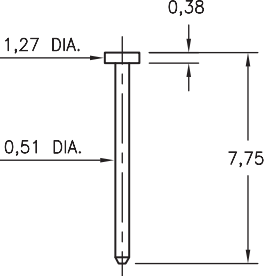
<p><b>8277</b> 8277-0-00-XX-00-00-03-0 Solder mount in 0,66 mounting hole</p> 	<p><b>8257</b> 8257-0-00-XX-00-00-33-0 Solder mount in 0,66 mounting hole</p> 	<p><b>4209</b> 4209-0-00-XX-00-00-33-0 Solder mount in 0,56 mounting hole</p> 	<p><b>8451</b> 8451-0-00-XX-00-00-33-0 Solder mount in 0,74 mounting hole</p> 
<p><b>5058</b> 5058-0-00-XX-00-00-03-0 Solder mount in 0,61 mounting hole</p> 	<p><b>5035</b> 5035-0-00-XX-00-00-33-0 Solder mount in 0,74 mounting hole</p> 	<p><b>9113</b> 9113-0-00-XX-00-00-38-0 Solder mount in 0,56 mounting hole Also available on 16mm wide carrier tape: 1,800 parts per 330mm reel. See page 224.2 for Tape &amp; Reel details</p> 	<p><b>5068</b> 5068-0-00-XX-00-00-03-0 Solder mount in 0,56 mounting hole</p> 
<p><b>9137</b> 9137-0-00-XX-00-00-38-0 Solder mount in 0,56 mounting hole</p> 	<p><b>7113</b> 7113-0-00-XX-00-00-03-0 Solder mount in 0,56 mounting hole</p> 	<p><b>4965</b> 4965-0-00-XX-00-00-33-0 Solder mount in 0,61 mounting hole</p> 	<p><b>4071</b> 4071-0-00-XX-00-00-33-0 Solder mount in 0,61 mounting hole</p> 

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - XX - 0

BASIC PART #













SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)



# MALE PCB PINS

## PRINTED CIRCUIT PINS • NAIL HEAD TYPE
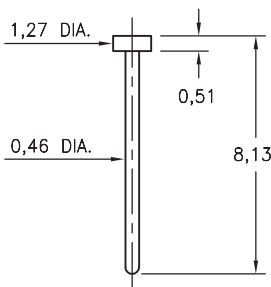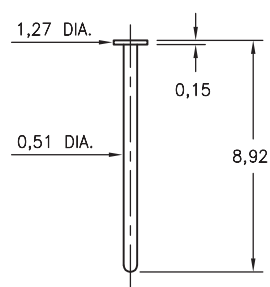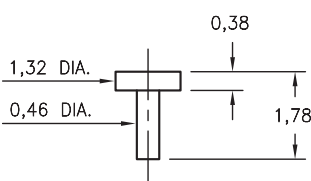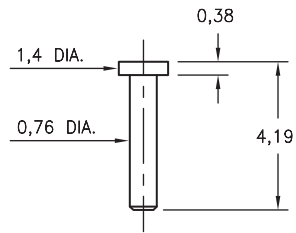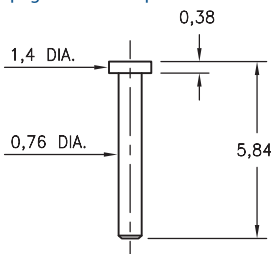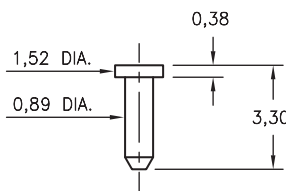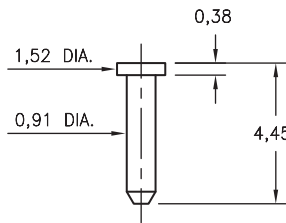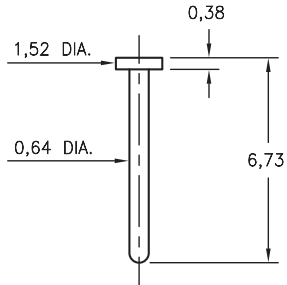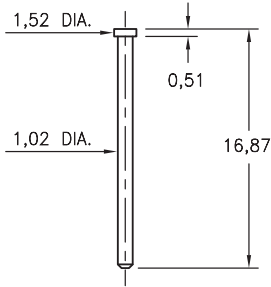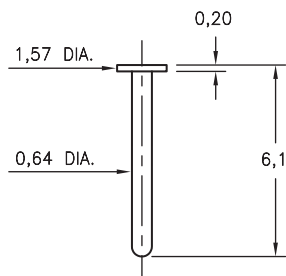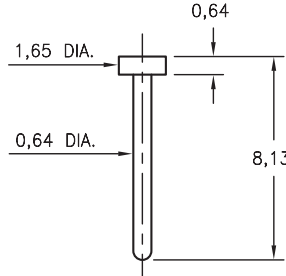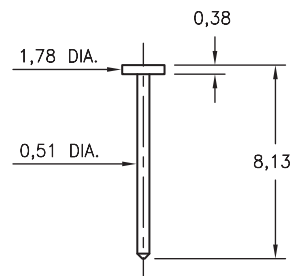
<p><b>5137</b> 5137-0-00-XX-00-00-38-0 Solder mount in 0,56 mounting hole</p> 	<p><b>4964</b> 4964-0-00-XX-00-00-33-0 Solder mount in 0,61 mounting hole</p> 	<p><b>4361</b> 4361-0-00-XX-00-00-33-0 Solder mount in 0,56 mounting hole Also available on 16mm wide carrier tape: 3,600 parts per 330mm reel. See page 224.2 for Tape &amp; Reel details</p> 	<p><b>6477</b> 6477-0-00-XX-00-00-38-0 Solder mount in 0,86 mounting hole</p> 
<p><b>4477</b> 4477-0-00-XX-00-00-33-0 Solder mount in 0,86 mounting hole Also available on 24mm wide carrier tape: 1,300 parts per 330mm reel. See page 224.2 for Tape &amp; Reel details</p> 	<p><b>4268</b> 4268-0-00-XX-00-00-33-0 Solder mount in 0,99 mounting hole</p> 	<p><b>9086</b> 9086-0-00-XX-00-00-33-0 Solder mount in 1,02 mounting hole</p> 	<p><b>5850</b> 5850-0-00-XX-00-00-03-0 Solder mount in 0,74 mounting hole</p> 
<p><b>1179</b> 1179-0-00-XX-00-00-33-0 Solder mount in 1,12 mounting hole</p> 	<p><b>5240</b> 5240-0-00-XX-00-00-33-0 Solder mount in 0,74 mounting hole</p> 	<p><b>6170</b> 6170-0-00-XX-00-00-03-0 Solder mount in 0,74 mounting hole</p> 	<p><b>8808</b> 8808-0-00-XX-00-00-33-0 Solder mount in 0,61 mounting hole</p> 

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Except where noted )

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - X - 00 - XX - 00 - 00 - XX - 0

**BASIC PART #** →

**SPECIFY PIN FINISH:**

- 01 5,08μm TIN/LEAD OVER NICKEL
- ◆ 80 5,08μm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25μm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51μm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27μm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS • NAIL HEAD TYPE


### 8330

**8330-0-00-XX-00-00-38-0**  
Solder mount in 1,12 mounting hole  
Also available on 24mm wide carrier tape:  
610 parts per 330mm reel.  
See page 224.2 for Tape & Reel details




### 6599

**6599-0-00-XX-00-00-03-0**  
Solder mount in 0,61 mounting hole




### 9265

**9265-0-00-XX-00-00-38-0**  
Solder mount in 1,6 mounting hole  
Also available on 16mm wide carrier tape:  
1,170 parts per 330mm reel.  
See page 224.2 for Tape & Reel details




### 2650

**2650-0-00-XX-00-00-33-0**  
Solder mount in 0,74 mounting hole




### 9872

**9872-0-00-XX-00-00-33-0**  
Solder mount in 1,24 mounting hole




### 9228

**9228-0-00-XX-00-00-38-0**  
Solder mount in 1,12 mounting hole



### 6095


**6095-X-00-XX-00-00-38-0**  
Solder mount in 1,12 mounting hole



Basic Part Number	Length L
<b>6095-0</b>	14,73
<b>6095-1</b>	12,07


### 6092

**6092-0-00-XX-00-00-33-0**  
Solder mount in 1,12 mounting hole




### 2381

**2381-0-00-XX-00-00-33-0**  
Solder mount in 1,37 mounting hole  
Also available on 16mm wide carrier tape:  
1,800 parts per 330mm reel.  
See page 224.3 for Tape & Reel details



### 5062

**5062-0-00-XX-00-00-33-0**  
Solder mount in 0,74 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: **XXXX - 0 - 00 - XX - 00 - 00 - XX - 0**

BASIC PART #

SPECIFY PIN FINISH:

- 01** 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- 80** 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- 15** 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- 21** 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- 34** 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)






# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 4541

4541-0-00-XX-00-00-03-0


Solder mount in 0,56 mounting hole



### 6142

6142-0-00-XX-00-00-33-0


Solder mount in 1,63 mounting hole



### 9022

9022-0-00-XX-00-00-33-0


Solder mount in 1,68 mounting hole  
Also available on 24mm wide carrier tape:  
1,500 parts per 330mm reel.  
See page 224.3 for Tape & Reel details



### 8086

8086-0-00-XX-00-00-33-0


Solder mount in 2,01 mounting hole  
Also available on 12mm wide carrier tape:  
550 parts per 330mm reel.  
See page 224.4 for Tape & Reel details




### 8086

8086-0-00-XX-00-00-33-0

Surface mount  
Also available on 24mm wide carrier tape:  
450 parts per 330mm reel.  
See page 224.4 for Tape & Reel details

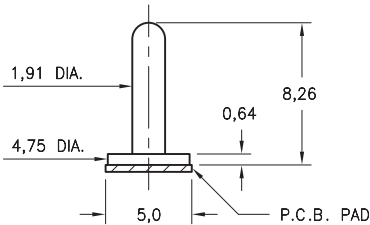

#### P.C.B. Layout



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm .005$   
Diameters:  $\pm .002$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - X - 00 - XX - 00 - 00 - XX - 0

**BASIC PART #**

**SPECIFY PIN FINISH:**


- 01 200  $\mu$ " TIN/LEAD OVER NICKEL
- ◆ 80 200  $\mu$ " TIN OVER NICKEL (RoHS)
- ◆ 15 10  $\mu$ " GOLD OVER NICKEL (RoHS)
- ◆ 21 20  $\mu$ " GOLD OVER NICKEL (RoHS)
- ◆ 34 50  $\mu$ " GOLD OVER NICKEL (RoHS)

# MALE PCB PINS

## STRAIGHT AND RIGHT ANGLE PINS

### 3320


3320-X-00-XX-00-00-03-0



Basic Part Number	Length L
3320-0	6,35
3320-1	12,7

### 3325/6527


XXXX-X-00-XX-00-00-03-0



Basic Part Number	Length L
3325-0	6,35
3325-1	12,7
3325-2	19,05
6527-0	10,67

### 3330


3330-X-00-XX-00-00-03-0



Basic Part Number	Length L
3330-0	6,35
3330-1	12,7
3330-2	19,05

### 3340


3340-X-00-XX-00-00-03-0



Basic Part Number	Length L
3340-0	6,35
3340-1	12,7
3340-2	19,05

### 3560


3560-X-00-XX-00-00-03-0



Basic Part Number	Length L
3560-0	6,35
3560-1	12,7
3560-2	19,05

### 3580

3580-X-00-XX-00-00-03-0



Basic Part Number	Length L
3580-0	6,35
3580-1	12,7
3580-2	19,05

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 03 - 0

BASIC PART #







SPECIFY PIN FINISH:

- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)



# MALE PCB PINS

## RIGHT ANGLE PINS
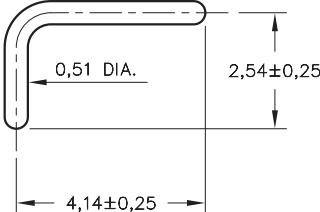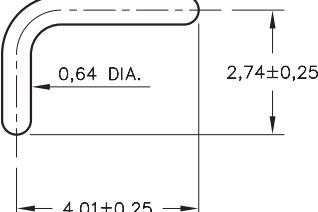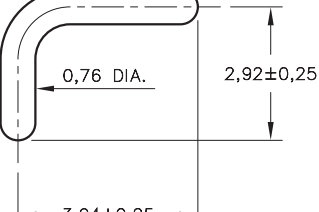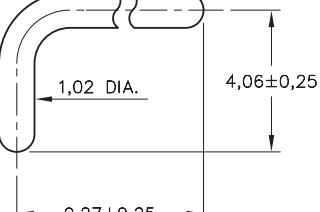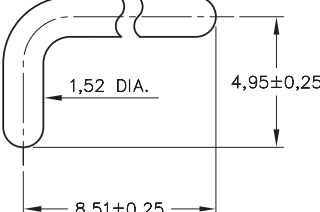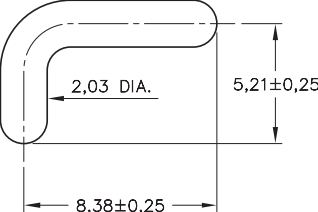
<p><b>3720</b> 3720-0-14-XX-00-00-03-0 Right Angle Bent Pin</p> 	<p><b>3725</b> 3725-0-14-XX-00-00-03-0 Right Angle Bent Pin</p> 	<p><b>3730</b> 3730-0-14-XX-00-00-03-0 Right Angle Bent Pin</p> 	<p><b>3740</b> 3740-0-14-XX-00-00-03-0 Right Angle Bent Pin</p> 
<p><b>3760</b> 3760-0-14-XX-00-00-03-0 Right Angle Bent Pin</p> 	<p><b>3780</b> 3780-0-14-XX-00-00-03-0 Right Angle Bent Pin</p> 		

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Except where noted )

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ±.005  
Diameters: ±.002  
Angles: ± 2°



**ORDER CODE:** 37XX - X - 00 - XX - 00 - 00 - 03 - 0

**BASIC PART #** →

→ **SPECIFY PIN FINISH:**

- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 4006

4006-X-00-XX-00-00-03-0

Hex press-fit in 0,86 mounting hole




Basic Part Number	Length V
4006-0	3,0
4006-1	4,78
4006-2	7,32

### 3121

3121-X-00-XX-00-00-08-0

Solder mount in 0,58 mounting hole  
Material is annealed.




Basic Part Number	Substrate Thickness	Length V
3121-1	0,64	1,55
3121-2	1,02	1,91

### 3128

3128-X-00-XX-00-00-08-0

Solder mount in 0,61 min. mounting hole




Basic Part Number	Length A
3128-1	6,35
3128-2	10,8
3128-3	13,34
3128-4	14,22
3128-5	23,62

### 3006

3006-0-00-XX-00-00-03-0


Press-fit in 0,86 mounting hole



### 8885

8885-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 6218

6218-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5012

5012-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 9081

9081-0-00-XX-00-00-08-0


Solder mount in 0,61 mounting hole



### 3039

3039-0-00-15-00-00-03-0

Press-fit in .025 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)






# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 5421

5421-0-00-XX-00-00-03-0


Solder mount in 0,58 or 0,53 mounting hole



### 7069

7069-0-00-XX-00-00-03-0


Solder mount in 1,12 or 0,61 mounting hole



### 5247

5247-0-00-XX-00-00-03-0


Solder mount in 0,89 mounting hole



### 6136

6136-0-00-XX-00-00-03-0


Solder mount in 1,12 or 0,86 mounting hole



### 0912/7912

X912-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Length A
0912-0	7,95
7912-0	12,95

### 8836

8836-0-00-XX-00-00-03-0


Press-fit in 1,91 mounting hole



### 6298

6298-0-00-XX-00-00-03-0


Press-fit in 2,11 mounting hole



### 1130

1130-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole  
Pin material is Phosphor Bronze 544 (B2)



### 6711

6711-0-00-XX-00-00-03-0


Solder mount in 1,09 mounting hole



### 1980

1980-0-00-00-XX-00-03-0


Surface mount, Target Connector  
Also available on carrier tape: 1,450 parts per 330mm reel. Order as: 319-10-1XX-40-080001



### 2820

2820-0-00-XX-00-00-03-0

Also available in HSMT connector series:  
328-XX-1XX-40-020001  
1,450 parts per 330mm reel  
See page 87.4 for Tape & Reel details



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except were noted)

**Dimensions:** Inches

**Tolerances On:** Lengths: ±.005  
Diameters: ±.002  
Angles: ± 2°



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 200 μ" TIN/LEAD OVER NICKEL
- ◆ 80 200 μ" TIN OVER NICKEL (RoHS)
- ◆ 15 10 μ" GOLD OVER NICKEL (RoHS)
- ◆ 21 20 μ" GOLD OVER NICKEL (RoHS)
- ◆ 34 50 μ" GOLD OVER NICKEL (RoHS)


# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 8685/9036

XXXX-0-00-XX-00-00-03-0

Press-fit in 0,84 mounting hole  
Pin material is Phosphor Bronze 544 (B2)




Basic Part Number	Length A
8685-0	3,18
9036-0	4,45

### 3790

3790-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 3796

3796-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 9051

9051-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 6109

6109-0-00-XX-00-00-03-0


Press-fit in 0,66 mounting hole



### 3155/5155

X155-0-00-XX-00-00-03-0

Press-fit in 0,66 mounting hole  
Pin material is Phosphor Bronze 544 (B2)




Basic Part Number	Length A
3155-0	4,57
5155-0	3,30

### 9159

9159-0-00-XX-00-00-03-0


Press-fit in 0,66 mounting hole



### 4366

4366-0-00-XX-00-00-03-0


Hex press-fit in 0,86 plated through-hole



### 7979/8979

X979-0-00-XX-00-00-03-0

Hex press-fit in 1,88 plated through-hole



Basic Part Number	Length L
8979-0	9,68
7979-0	17,6

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### X435

**X435-X-05-XX-00-00-03-0**

Square press-fit in 0,56 plated through-hole




Basic Part Number	Length L
<b>5435-0</b>	7,70
<b>5435-1</b>	5,08
<b>5435-2</b>	10,49
<b>6435-0</b>	7,11

### 8969

**8969-0-05-XX-00-00-03-0**


Square press-fit in 0,58 plated through-hole  
(Use .7mm drill prior to plating)



### 5835

**5835-0-05-XX-00-00-03-0**


Square press-fit in 0,81 plated through-hole



### 1267

**1267-0-00-XX-00-00-03-0**


Press-fit in 0,89 mounting hole



### 7827

**7827-0-00-XX-00-00-03-0**


Press-fit in 0,89 mounting hole



### 3129

**3129-1-00-XX-00-00-08-0**


Swage mount in 0,89 hole  
For 0,79 thick board



### 3135

**3135-1-00-XX-00-00-08-0**


Swage mount in 1,02 hole  
For 0,79 thick board



### 3210

**3210-2-00-XX-00-00-08-0**


Swage mount in 0,79 hole  
For 1,57 thick board



### 3147

**3147-3-00-XX-00-00-08-0**


Swage mount in 1,09 hole  
For 2,39 thick board



### 3116

**3116-X-00-XX-00-00-08-0**

Swage mount in 1,32 hole



Basic Part Number	Board Thickness	Length V	Depth D
<b>3116-1</b>	0,79	1,30	0,89
<b>3116-2</b>	1,57	2,08	1,57
<b>3116-3</b>	2,39	2,87	1,57
<b>3116-4</b>	3,18	3,68	1,57

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



**ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0**

**BASIC PART #**

**SPECIFY PIN FINISH:**

- 01** 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- 80** 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- 15** 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- 21** 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- 34** 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 1067

1067-X-00-XX-00-00-03-0

Press-fit in 1,07/1,40 mounting hole




Basic Part Number	Knurl Dia. E	Mounting Hole
1067-1	1,47	1,40
1067-2	1,14	1,07

### 3158

3158-0-00-XX-00-00-03-0


Press-fit in 0,58 mounting hole



### 9000

9000-0-00-XX-00-00-03-0


Pentagonal press-fit in 0,64 plated through-hole



### 3157

3157-0-00-XX-00-00-03-0


Press-fit in 0,66 mounting hole



### 0915

0915-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 3154

3154-0-00-XX-00-00-03-0


Press-fit in 0,66 mounting hole  
Pin material is Phosphor Bronze 544 (B2)



### 0542

0542-0-00-XX-00-00-03-0


Hex press-fit in 0,99 plated through-hole



### 0522

0522-0-00-XX-00-00-03-0


Pentagonal press-fit in 1,07 plated through-hole



### 0952

0952-0-00-XX-00-00-03-0


Press-fit in 1,42 mounting hole



### 0257

0257-0-00-XX-00-00-03-0


Press-fit in 1,50 mounting hole



### 8940

8940-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: **XXXX - X - 00 - XX - 00 - 00 - 03 - 0**

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)






# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 0504/0505

050X-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Material
0504-0	Phosphor Bronze 544
0505-0	Brass 360

### 5510/5511

551X-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Standoff Height S
5510-0	8,41
5511-0	15,39

### 4259

4259-X-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Standoff Height S
4259-1	5,33
4259-2	8,51
4259-3	14,86
4259-4	21,21

### X516

X516-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Length A	Pin Length B
3516-0	3,18	2,74
4516-0	3,43	3,0

### 8859

8859-0-00-XX-00-00-03-0


Press-fit in 1,42 mounting hole



### 6585

6585-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole  
Pin material is Phosphor Bronze 544 (B2)



### 3404

3404-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 9218

9218-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 1752/6458

XXXX-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Length K
1752-0	0,51
6458-0	0,89

### 3413/8404

X4XX-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Length S
3413-0	3,0
8404-0	3,33

### 9075

9075-0-00-XX-00-00-03-0


Press-fit in 0,86 mounting hole



### 2617

2617-0-01-XX-00-00-03-0


Compliant press-fit in 1,02 ± 0,08 plated hole. For 1,52 → 2,54 thick board



### 5607

5607-0-01-XX-00-00-03-0


Compliant press-fit in 1,02 ± 0,08 plated hole. For 1,52 → 2,54 thick board



### 8995

8995-0-01-XX-00-00-03-0


Compliant press-fit in 1,02 ± 0,08 plated hole. For 1,52 → 2,54 thick board



### 9218

9218-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5065

5065-0-00-26-00-00-03-0

Press-fit in 0,94 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3409

3409-X-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Length A
3409-1	5,33
3409-2	10,67

### 0315

0315-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole

Pin material is Phosphor Bronze 544 (B2)




Basic Part Number	Head Height K	Standoff Height S
0315-0	0,76	4,83
0315-1	1,02	10,92

### 5503/5509

550X-X-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Diameter H
5503-0	0,64
5509-0	0,46

### 5504/5505

550X-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Standoff Height S
5504-0	8,41
5505-0	15,39

### 3406

3406-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5011

5011-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5113

5113-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 3900

3900-0-00-15-00-00-03-0

Press-fit in 1,45 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3400 ⇨ 3402/3405/3410

34XX-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Shoulder Height V	Length S	Length L
3402-0	1,32	3,51	2,92
3401-0	2,54	3,45	2,92
3405-0	4,29	3,71	2,92
3400-0	11,71	3,68	2,92
3410-0	23,72	3,45	3,15

### 3411

3411-X-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Length A
3411-0	10,59
3411-1	5,51

### 0600

0600-0-05-XX-00-00-01-0


Solder mount 1,32 mounting hole



### 0290

0290-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 7007

7007-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5016

5016-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5005

5005-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5107

5107-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 8919

8919-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 3077

3077-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)






# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3408

3408-X-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Length A
3408-1	3,07
3408-2	4,60

### 0270/0282

02XX-0-01-XX-00-00-03-0

Press-fit in 1,45 mounting hole




Basic Part Number	Pin Material
0270-0	Phosphor Bronze 544
0282-0	Brass 360

### 0700

0700-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 8006

8006-0-00-XX-00-00-03-0


Press-fit in 0,86 mounting hole



### 0265

0265-0-01-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 0272

0272-0-01-XX-00-00-03-0

Press-fit in 1,45 mounting hole




### 8000

8000-0-01-XX-00-00-03-0

Press-fit in 1,45 mounting hole

For wire sizes up to 22 AWG




### 0275

0275-0-01-XX-00-00-03-0

Press-fit in 1,45 mounting hole

Pin material is Phosphor Bronze 544 (B2)

For wire sizes up to 22 AWG




### 1107

1107-0-01-15-00-00-03-0

Press-fit in 1,45 mounting hole


For wire sizes up to 20 AWG



### 9976

9976-0-00-XX-00-00-03-0

Press-fit in 0,97 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3117

3117-X-00-XX-00-00-08-0

Swage mount in 0,89 hole




Basic Part Number	Board Thickness	Length V
3117-1	0,79	1,19
3117-2	1,57	1,98
3117-3	2,39	2,79
3117-4	3,18	3,58

### 3114/3115

311X-X-00-XX-00-00-08-0

Swage mount in 0,89 mounting hole




Basic Part Number	Board Thickness	Length A	Length V
3114-1	0,79	3,81	1,30
3114-2	1,57	3,81	2,08
3115-1	0,79	7,62	1,30
3115-2	1,57	7,62	2,08

### 3112

3112-X-00-XX-00-00-08-0

Swage mount in 1,09 hole




Basic Part Number	Board Thickness	Length V
3112-1	0,79	1,30
3112-2	1,57	2,08
3112-3	2,39	2,87

### 3118/3119

311X-X-00-XX-00-00-08-0

Swage mount in 0,89 hole




Basic Part Number	Board Thickness	Length S	Length V
3118-1	0,79	4,32	1,30
3118-2	1,57	4,32	2,08
3119-1	0,79	10,67	1,30
3119-2	1,57	10,67	2,08

### 3139

3139-0-00-XX-00-00-08-0


Wire crimp termination. Accepts wire sizes 24 AWG Max. / 28 AWG Min.



### 3602

3602-0-07-XX-00-00-08-0


Annealed  
Wire crimp termination. Accepts wire sizes 20 AWG Max. / 24 AWG Min.



### 3603

3603-0-07-XX-00-00-08-0


Annealed  
Wire crimp termination. Accepts wire sizes 20 AWG Max. / 24 AWG Min.



### 3131

3131-1-00-XX-00-00-08-0

Swage mount in 1,09 hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 0259/0286/1941

XXXX-0-00-XX-00-00-03-0

Press-fit in 1,45/1,5 mounting hole  
0286-0 is available on 16mm wide carrier tape; 2,500 parts per 330mm reel.  
See page 224.3 for Tape & Reel details




Basic Part Number	Length L	Barb Dia. E	Mounting Hole
0259-0	4,39	1,57	1,5
0286-0	2,92	1,52	1,45
*1941-0	4,29	1,47	1,42

\* Flat face Target contact

### 2956-0

2956-0-00-XX-00-00-03-0


Surface mount



### 2956-1

2956-1-00-XX-00-00-03-0


Surface mount



### 4956-1

4956-1-00-XX-00-00-33-0


Surface mount



### 8876

8876-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 1938

1938-0-00-XX-00-00-03-0


Flat face Target contact, solder Tail  
Press-fit in 1,45 mounting hole



### 1940

1940-0-00-XX-00-00-03-0


Flat face Target contact, solder Tail  
Press-fit in 1,45 mounting hole



### 1942

1942-0-00-XX-00-00-03-0


Flat face Target contact, solder Tail  
Press-fit in 1,42 mounting hole



### 3024

3024-0-01-XX-00-00-03-0


Flat face Target contact, solder cup  
Press-fit in 1,42 mounting hole  
For wire sizes up to 22 AWG



### 3000

3000-0-00-XX-00-00-03-0


Flat face Target contact, wire termination  
Press-fit in 1,55 mounting hole. Accepts wire sizes 24 AWG Max. / 28 AWG Min.



### 6430

6430-0-00-XX-00-00-03-0

Press-fit in 0,64 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ±0,13  
Diameters: ±0,051  
Angles: ±2°



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3130/3134

31XX-X-00-XX-00-00-08-0

Swage mount in 1,32 hole




Basic Part Number	Board Thickness	Length A	Length V
3134-1	0,79	2,01	1,30
3134-2	1,57	2,01	2,08
3134-3	2,39	2,01	2,87
3134-4	3,18	2,01	3,68
3130-1	0,79	4,55	1,30
3130-2	1,57	4,55	2,08
3130-3	2,39	4,55	2,87
3130-4	3,18	4,55	3,68

### 3113

3113-X-00-XX-00-00-08-0

Swage mount in 1,57 hole




Basic Part Number	Board Thickness	Length V	Depth D
3113-1	0,79	1,57	1,02
3113-2	1,57	2,39	1,57
3113-3	2,39	3,18	1,57
3113-4	3,18	3,96	1,57

### 3151

3151-X-00-XX-00-00-08-0

Swage mount in 1,32 hole




Basic Part Number	Board Thickness	Length A	Length V
3151-1	0,79	12,17	1,30
3151-2	1,57	12,17	2,08
3151-3	2,39	12,17	2,87
3151-4	3,18	12,17	3,68

### 3301 ⇨ 3304

330X-X-14-XX-00-00-08-0

Specify board thickness

Swage mount in 1,09 hole




Basic Part Number	Pin Centers A
3301-X	6,53
3302-X	9,07
3303-X	9,53
3304-X	14,27

- X -	Board Thickness	Length V
1	0,79	1,30
2	1,57	2,08
3	2,39	2,87

### 3620

3620-X-32-XX-00-00-08-0

Board edge rivet mount.




Basic Part Number	Board Thickness	Slot S
3620-1	0,79	1,19
3620-2	1,57	1,91

### 0940

0940-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 3621

3621-0-32-XX-00-00-08-0

Board edge rivet mount



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3110/3111

311X-X-00-XX-00-00-08-0

Swage mount in 1,09 hole




Basic Part Number	Board Thickness	Length A	Length V
3110-1	0,79	3,81	1,30
3110-2	1,57	3,81	2,08
3110-3	2,39	3,81	2,87
3111-1	0,79	7,62	1,30
3111-2	1,57	7,62	2,08
3111-3	2,39	7,62	2,87

### 3150

3150-X-00-XX-00-00-08-0

Swage mount in 1,09 mounting hole




Basic Part Number	Board Thickness	Length V
3150-1	0,79	1,30
3150-2	1,57	2,08

### 3136/3137

313X-X-00-XX-00-00-08-0

Solder mount in 1,09 mounting hole  
3137-1 is available on 16mm wide carrier tape: 580 parts per 330mm reel.  
See page 224.2 for Tape & Reel details




Basic Part Number	Board Thickness	Length V	Flange Dia. C
3136-1	1,57	2,08	
3136-2	2,39	2,79	1,98
3136-3	3,18	3,68	
3137-1	1,57	2,08	1,57
3137-2	2,39	2,79	
3137-3	3,18	3,68	
3137-4	3,96	4,70	

### 3148

3148-3-00-XX-00-00-08-0


Swage mount in 1,57 hole  
For a 2,39 thick board



### 8815

8815-0-00-XX-00-00-03-0


Hex press-fit in 1,68 plated through-hole



### 6821

6821-0-00-XX-00-00-08-0


Turret terminal pin



### 3132

3132-0-00-XX-00-00-08-0


Wire crimp termination, Annealed  
Accepts wire sizes 22 AWG Max. / 24 AWG Min.



### 5601

5601-0-01-XX-00-00-03-0


Compliant press-fit in 1,02 ± 0,08 plated through-hole. For 1,52 → 2,54 thick board



### 5602

5602-0-01-XX-00-00-03-0

Compliant press-fit in 1,02 ± 0,08 plated through-hole. For 2,29 → 3,30 thick board



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3120

3120-X-00-XX-00-00-08-0

Swage mount in 0,86 hole




Basic Part Number	Pin Length A
3120-1	5,21
3120-2	6,35

### 3122 ⇔ 3153

31XX-X-00-XX-00-00-08-0

Swage mount in 1,09 hole




Basic Part Number	Pin Length A
3153-X	4,57
3141-X	5,84
3122-X	7,11
3149-X	9,65
3123-X	14,73
3140-X	19,81
3124-X	22,35

-X-	Board Thickness	Length V
1	0,79	1,3
2	1,57	2,08

### 3101 ⇔ 3106

310X-X-00-XX-00-00-08-0

Swage mount in 1,09 hole




Basic Part Number	Pin Length A
3101-X	3,81
3102-X	4,78
3103-X	7,62
3104-X	12,7
3105-X	19,05
3106-X	25,40

-X-	Board Thickness	Length V
1	0,79	1,30
2	1,57	2,08
3	2,39	2,87

### 3221 ⇔ 3223

322X-0-00-XX-00-00-08-0

Swage mount in 1,09 hole




Basic Part Number	Pin Length A
3221-X	2,54
3222-X	3,81
3223-X	7,62

-X-	Board Thickness	Length V
1	0,79	1,30
2	1,57	2,08
3	2,39	2,87

### 3125/3126

312X-X-00-XX-00-00-08-0

Swage mount in 1,09 hole




Basic Part Number	Pin Length S
3125-X	4,32
3126-X	10,67

-X-	Board Thickness	Length V
1	0,79	1,30
2	1,57	2,08
3	2,39	2,87

### 6061

6061-0-00-XX-00-00-03-0


Press-fit in 1,02 mounting hole



### 4526

4526-0-00-XX-00-00-03-0

Press-fit in 1,02 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)



# MALE PCB PINS

## PRINTED CIRCUIT PINS

<p><b>4123</b> 4123-0-00-XX-00-00-08-0</p> <p>Swage mount in 1,12 hole For a 1,57 thick board</p>	<p><b>2231</b> 2231-0-00-XX-00-00-08-0</p> <p>Swage mount in 2,36 hole For a 0,79 thick board</p>	<p><b>4395</b> 4395-0-00-XX-00-00-08-0</p> <p>Swage mount in 2,36 hole For a 1,57 thick board</p>	<p><b>5233</b> 5233-0-00-XX-00-00-08-0</p> <p>Swage mount in 2,36 hole For a 1,57 thick board</p>
<p><b>6331</b> 6331-0-00-XX-00-00-08-0</p> <p>Swage mount in 2,39 hole For a 3,18 thick board</p>	<p><b>4194</b> 4194-0-00-XX-00-00-08-0</p> <p>Wire crimp termination &amp; press-fit in 0,91 hole Accepts wire sizes 30 AWG Max. / 36 AWG Min.</p>	<p><b>5556</b> 5556-0-00-XX-00-00-38-0</p> <p>Wire crimp termination. Accepts wire sizes 30 AWG Max. / 36 AWG Min.</p>	<p><b>6788</b> 6788-0-00-XX-00-00-03-0</p> <p>Annealed Wire crimp termination. Accepts wire sizes 20 AWG Max. / 24 AWG Min.</p>

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Except swage pins which are annealed )

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - 0 - 0X - XX - 00 - 00 - XX - 0

**BASIC PART #** →

**SPECIFY PIN FINISH:**

- 01 5,08μm TIN/LEAD OVER NICKEL
- ◆ 80 5,08μm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25μm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51μm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27μm GOLD OVER NICKEL (RoHS)


# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 8600/8954/8955

8XXX-X-05-XX-00-00-03-0

Square press-fit in 1,09 plated through-hole




Basic Part Number	Pin Length A
8600-0	10,16
8600-1	21,59
8600-2	30,48
8954-0	3,45
8955-0	16,64

### 3159

3159-X-00-XX-00-00-08-0

Swage mount in 1,63 hole




Basic Part Number	Board Thickness	Length V
3159-1	0,79	1,57
3159-2	1,57	2,39
3159-3	2,39	3,18
3159-4	3,18	3,96

### 8952

8952-0-05-XX-00-00-03-0


Square press-fit in 2,21 plated through-hole



### 8953

8953-0-05-XX-00-00-03-0


Square press-fit in 1,19 plated through-hole



### 3230

3230-X-00-XX-00-00-08-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length A	Length V
3230-1	0,79	5,13	1,65
3230-2	1,57	5,79	2,41
3230-3	2,39	6,55	3,18
3230-4	3,18	7,32	3,94

### 3146

3146-2-00-XX-00-00-08-0

Swage mount in 1,93 hole

For a 1,57 thick board




### 3142

3142-2-00-XX-00-00-08-0

Swage mount in 1,57 hole

For a 1,57 thick board




### 3232

3232-3-00-XX-00-00-08-0

Swage mount in 1,57 hole

For a 2,39 thick board




### 3145

3145-2-00-XX-00-00-08-0

Swage mount in 1,93 hole

For a 1,57 thick board



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)






# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3231

3231-X-00-XX-00-00-08-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
3231-2	1,57	2,39
3231-3	2,39	3,18
3231-4	3,18	3,96

### 3609

3609-X-07-XX-00-00-08-0

Wire crimp termination. Accepts wire sizes 16 AWG Max. / 20 AWG Min.




Basic Part Number	Pin Length A
3609-1	5,08
3609-2	9,53
3609-3	12,7

### 3601

3601-X-07-XX-00-00-08-0

Wire crimp termination. Accepts wire sizes 20 AWG Max. / 24 AWG Min.




Basic Part Number	Pin Length A
3601-1	5,08
3601-2	9,53
3601-3	12,7

### 3133/3138/3152

31XX-X-00-XX-00-00-08-0

Specify board thickness  
Swage mount in 1,63 hole




Basic Part Number	Pin Length A
3152-X	2,39
3133-X	5,56
3138-X	7,16

-X-	Board Thickness	Length V
1	0,79	1,60
2	1,57	2,39
3	2,39	3,18
4	3,18	3,96

### 3144

3144-X-00-XX-00-00-08-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V
3144-1	0,79	1,35
3144-2	1,57	2,13
3144-3	2,39	2,92

### 3233

3233-2-00-XX-00-00-08-0


Swage mount in 2,39 hole  
For a 1,57 thick board



### 0520

0520-0-00-XX-00-00-03-0

Annealed  
Wire crimp termination. Accepts wire sizes 20 AWG Max. / 24 AWG Min.



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS


### 1943

1943-0-00-15-00-00-03-0

Concave face Target contact, surface mount  
Also available on 16mm wide carrier tape:  
2,200 parts per 330mm reel.  
See page 224.3 for Tape & Reel details

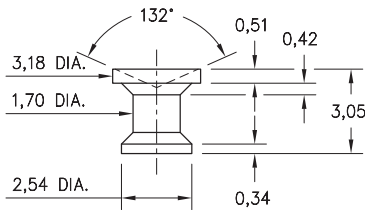


P.C.B. Layout




### 1944

1944-0-00-15-00-00-03-0

Flat face Target contact, surface mount  
Also available on 16mm wide carrier tape:  
2,200 parts per 330mm reel.  
See page 224.3 for Tape & Reel details

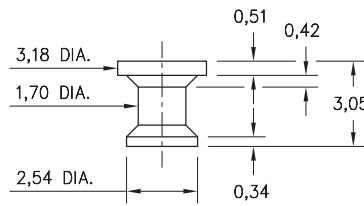


P.C.B. Layout



### 1945

1945-0-00-15-00-00-03-0


Concave face Target contact, Solder Tail



### 1946

1946-0-00-15-00-00-03-0


Flat face Target contact, Solder Tail



### 1947

1947-0-00-15-00-00-03-0


Concave face Target contact, surface mount  
Press-fit in 1,42 mounting hole



### 1948

1948-0-00-15-00-00-03-0


Concave face Target contact, Solder Tail  
Press-fit in 1,42 mounting hole



### 1949

1949-0-00-15-00-00-03-0


Flat face Target contact, surface mount  
Press-fit in 1,42 mounting hole



### 1950

1950-0-00-15-00-00-03-0


Concave face Target contact, surface mount  
Press-fit in 1,42 mounting hole



### 1951

1951-0-00-15-00-00-03-0


Flat face Target contact, Solder Tail  
Press-fit in 1,42 mounting hole



### 1952

1952-0-00-15-00-00-03-0

Concave face Target contact, Solder Tail  
Press-fit in 1,42 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: 194X - 0 - 00 - 15 - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

◆ 15 0,25µm GOLD OVER NICKEL (RoHS)



# MALE PCB PINS

## PRINTED CIRCUIT PINS

<p><b>1958</b> 1958-0-00-15-00-00-03-0 Concave face Target contact, solder Tail Press-fit in 1,45 mounting hole</p>	<p><b>1960</b> 1960-0-00-15-00-00-03-0 Concave face Target contact, solder Tail Press-fit in 1,45 mounting hole</p>	<p><b>1831</b> 1831-1-00-15-00-00-03-0 Concave face Target contact, solder Tail Hex press-fit in 0,86 mounting hole</p>	<p><b>1931</b> 1931-1-00-15-00-00-03-0 Flat face Target contact, solder Tail Hex press-fit in 0,86 mounting hole</p>
<p><b>1953</b> 1953-0-00-XX-00-00-03-0 Flat face Target contact, surface mount Press-fit in 1,42 mounting hole</p>	<p><b>1954</b> 1954-0-00-XX-00-00-03-0 Flat face Target contact, surface mount Press-fit in 1,42 mounting hole</p>	<p><b>1955</b> 1955-0-00-15-00-00-03-0 Concave face Target contact, surface mount Press-fit in 1,42 mounting hole</p>	<p><b>1957</b> 1957-0-00-15-00-00-03-0 Concave face Target contact, surface mount Press-fit in 1,42 mounting hole</p>
<p><b>1933</b> 1933-0-00-XX-00-00-03-0 Flat face Target contact, solder Tail Press-fit in 0,86 mounting hole</p>	<p><b>1935</b> 1935-0-00-XX-00-00-03-0 Flat face Target contact, surface mount Press-fit in 0,86 mounting hole</p>	<p><b>1934</b> 1934-0-00-15-00-00-03-0 Concave face Target contact, solder Tail Press-fit in 0,86 mounting hole</p>	<p><b>1936</b> 1936-0-00-15-00-00-03-0 Concave face Target contact, surface mount Press-fit in 0,86 mounting hole</p>

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - 0 - 00 - XX - 00 - 00 - 03 - 0

**BASIC PART #**

**SPECIFY PIN FINISH:**

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 1140

1140-0-01-XX-00-00-03-0


Press-fit in 1,45 mounting hole  
For wire sizes up to 20 AWG



### 1160

1160-0-01-XX-00-00-03-0


Press-fit in 2,03 mounting hole  
For wire sizes up to 16 AWG



### 1178

1178-0-01-XX-00-00-03-0


Press-fit in 2,54 mounting hole  
For wire sizes up to 14 AWG



### 4658

4658-0-00-XX-00-00-08-0


Swage mount 1,09 mounting hole



### 4275

4275-0-00-XX-00-00-08-0


Swage mount 1,09 mounting hole



### 9103

9103-0-00-XX-00-00-08-0


Swage mount 1,09 mounting hole



### 4357

4357-0-00-XX-00-00-03-0


Solder mount 1,63 mounting hole



### 9242

9242-0-00-XX-00-00-08-0


Swage mount 2,39 mounting hole



### 4639/4717

4XXX-0-00-XX-00-00-08-0

Swage mount 1,65 mounting hole




Basic Part Number	Pin Length A
4639-0	10,97
4717-0	8,43

### 3169

3169-0-61-15-00-00-03-0

Pins are mounted on a removable Kapton tape carrier at 2,54 pitch.  
Packaged on continuous strip spools of 1,000 pins.  
(Contact distributors for other order quantity options.)

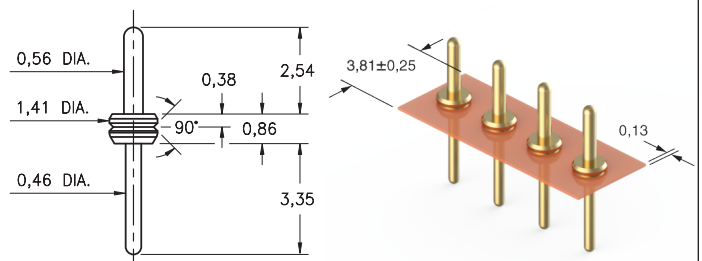

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



**ORDER CODE:** XXXX - 0 - 00 - XX - 00 - 00 - 03 - 0

**BASIC PART #**

**SPECIFY PIN FINISH:**

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 5920

5920-0-00-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: 2,18mm (.086")

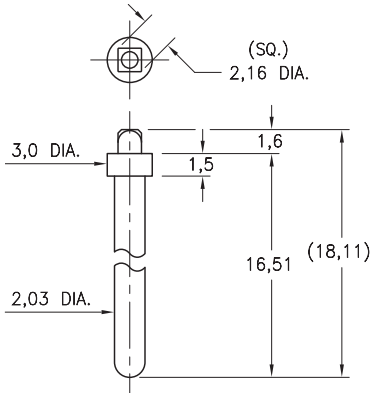

### 6025

6025-0-00-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: 1,73mm (.068")

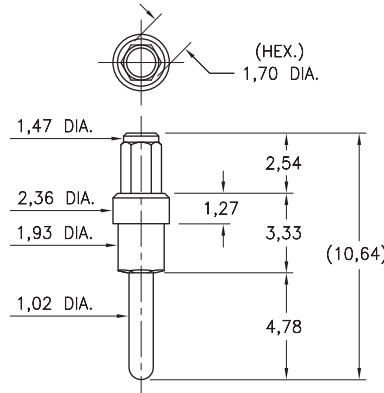

### 6035

6035-0-00-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: 1,73mm (.068")

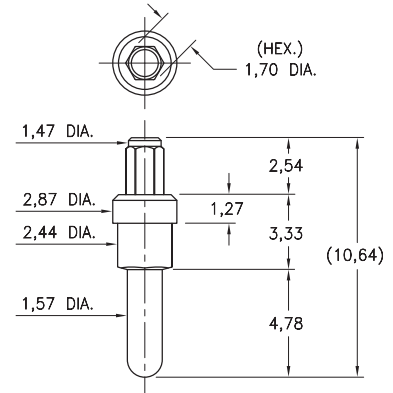

### 8237

8237-0-05-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: 2,34mm (.092")

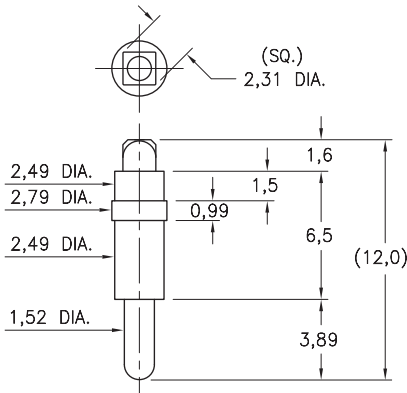

### 6834

6834-0-00-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: 1,3mm (.0512")

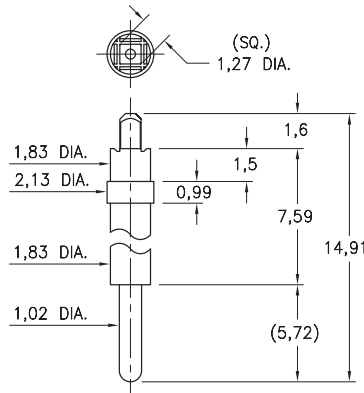

### 6835

6835-0-00-XX-00-00-44-0

Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: 2,34mm (.092")  
\* Pin Material: Tellurium Copper Alloy

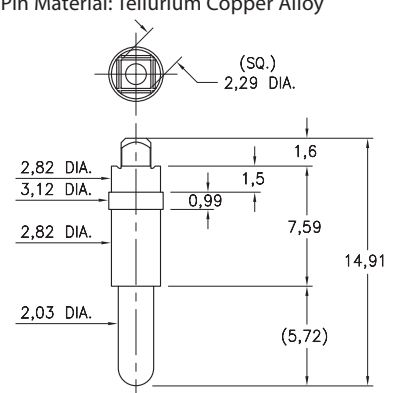

Recommended drilled hole sizes are prior to plating of the PCB and based on typical copper deposition of .5 - 1 oz. This results in a reduction of hole size by approximately 0,038 - 0,076. Depending on surface plating, typical finished hole sizes are 0,076 - 0,127 smaller than drilled hole sizes. The finished hole size tolerance for press-fit applications should be specified as +/- 0,051

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted) \*

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



**ORDER CODE:** XXXX - 0 - 0X - XX - 00 - 00 - XX - 0

**BASIC PART #** →

**SPECIFY PIN FINISH:**

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)



# MALE PCB PINS

## PRINTED CIRCUIT PINS

<p><b>1959-0</b> 1959-0-00-15-00-00-03-0 Flat face Target contact, surface mount Press-fit in 2,49 mounting hole</p>	<p><b>1959-1</b> 1959-1-00-15-00-00-03-0 Concave face Target contact, surface mount Press-fit in 2,49 mounting hole</p>	<p><b>1969-0</b> 1969-0-00-15-00-00-03-0 Flat face Target contact, solder Tail Press-fit in 2,49 mounting hole</p>	<p><b>1969-1</b> 1969-1-00-15-00-00-03-0 Concave face Target contact, solder Tail Press-fit in 2,49 mounting hole</p>						
<p><b>1968-0</b> 1968-0-01-15-00-00-03-0 Flat face Target contact, Press-fit in 2,46 mounting hole. For wire sizes up to 16AWG</p>	<p><b>1968-1</b> 1968-1-01-15-00-00-03-0 Concave face Target contact, Press-fit in 2,46 mounting hole. For wire sizes up to 16AWG</p>	<p><b>3078</b> 3078-X-00-15-00-00-03-0 Press-fit in 1,45 mounting hole For wire sizes up to 22 AWG</p> <table border="1" data-bbox="1218 924 1429 1092"> <thead> <tr> <th>Basic Part Number</th> <th>Pin Length A</th> </tr> </thead> <tbody> <tr> <td>3078-0</td> <td>3,68</td> </tr> <tr> <td>3078-1</td> <td>5,21</td> </tr> </tbody> </table>		Basic Part Number	Pin Length A	3078-0	3,68	3078-1	5,21
Basic Part Number	Pin Length A								
3078-0	3,68								
3078-1	5,21								
<p><b>3180</b> 3180-2-01-XX-00-00-03-0 Press-fit in 1,4 mounting hole For wire sizes up to 22 AWG</p>	<p><b>3080</b> 3080-0-01-XX-00-00-03-0 Press-fit in 1,45 mounting hole For wire sizes up to 22 AWG</p>	<p><b>0518</b> 0518-0-01-XX-00-00-03-0 Press-fit in 1,5 mounting hole For wire sizes up to 22 AWG</p>							

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Annealed )

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - 0 - 00 - XX - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## CRIMP PINS FOR 12-28 AWG WIRE

### 3922

#### 3922-0-01-XX-00-00-08-0

Wire crimp termination. Accepts wire sizes 22 AWG Max. / 28 AWG Min.




Dimensions per M39029/58-360

### 3920

#### 3920-0-01-XX-00-00-08-0

Wire crimp termination. Accepts wire sizes 20 AWG Max. / 24 AWG Min.




Dimensions per M39029/58-363

### 3916

#### 3916-0-01-XX-00-00-08-0

Wire crimp termination. Accepts wire sizes 16 AWG Max. / 20 AWG Min.




Dimensions per M39029/58-364

### 3914

#### 3914-0-01-XX-00-00-08-0

Wire crimp termination. Accepts wire sizes 16 AWG Max. / 20 AWG Min.




Dimensions per M39029/1-102

### 3912

#### 3912-0-01-XX-00-00-08-0

Wire crimp termination. Accepts wire sizes 12 AWG Max. / 14 AWG Min.



Dimensions per M39029/58-365

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard (Annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** 39XX - X - 01 - XX - 00 - 00 - 08 - 0

**BASIC PART #**

**SPECIFY PIN FINISH:**

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 3975

**3975-0-00-XX-00-00-03-0**


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,78mm) .070"

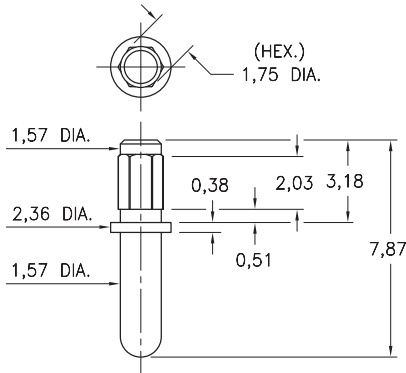

### 3977

**3977-0-00-XX-00-00-03-0**


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,78mm) .070"

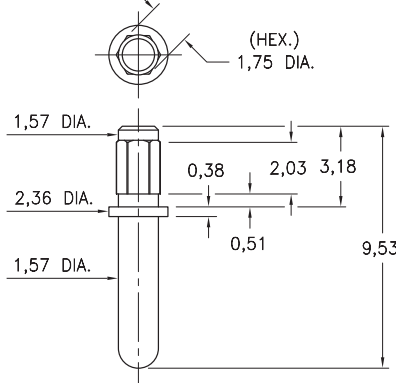

### 4427

**4427-0-00-XX-00-00-03-0**


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,73mm) .068"

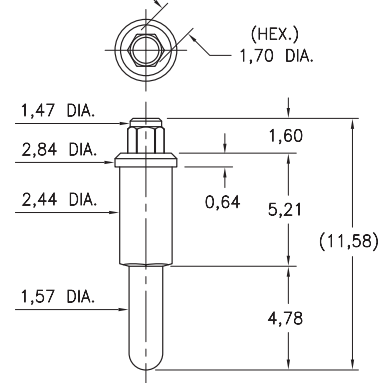

### 7504

**7504-0-00-XX-00-00-03-0**


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,73mm) .068"

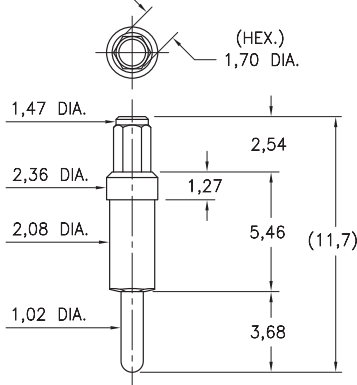

### 9003

**9003-0-00-XX-00-00-03-0**


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,19mm) .047"

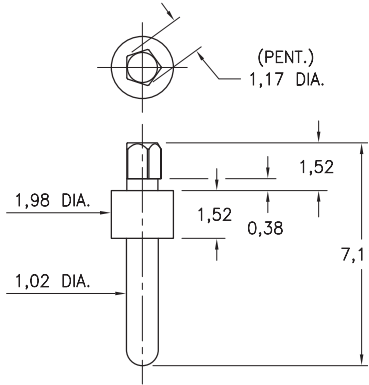

### 6955

**6955-0-05-XX-00-00-03-0**

Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (2,31mm) .091"

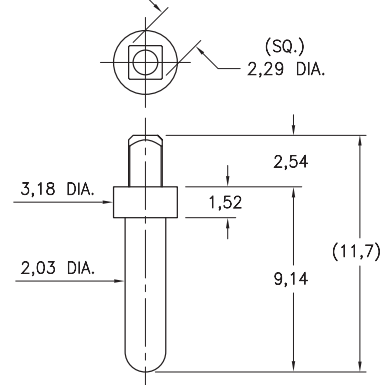

Recommended drilled hole sizes are prior to plating of the PCB and based on typical copper deposition of .5 - 1 oz. This results in a reduction of hole size by approximately 0,038 - 0,076. Depending on surface plating, typical finished hole sizes are 0,076 - 0,127 smaller than drilled hole sizes. The finished hole size tolerance for press-fit applications should be specified as +/- 0,051

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted) \*

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



**ORDER CODE:** XXXX - 0 - 0X - XX - 00 - 00 - XX - 0

**BASIC PART #** →

**SPECIFY PIN FINISH:**

- 01** 5,08µm TIN/LEAD OVER NICKEL
- ◆ **80** 5,08µm TIN OVER NICKEL (RoHS)
- ◆ **15** 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ **21** 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ **34** 1,27µm GOLD OVER NICKEL (RoHS)






# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 1655

1655-0-00-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,28mm) .0505"

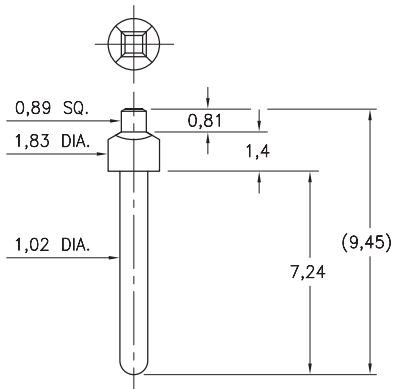

### 4219

4219-0-05-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,28mm) .0505"

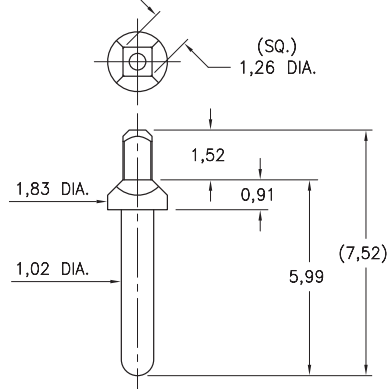

### 5459

5459-0-00-XX-00-00-03-0


Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,3mm) .051"

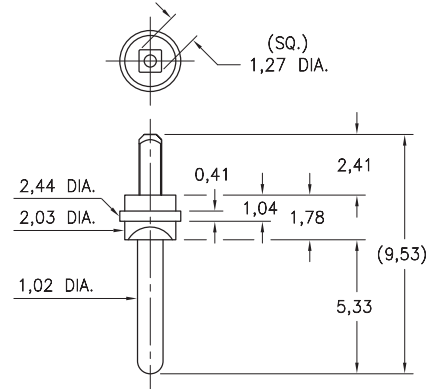

### 9061

9061-0-00-XX-00-00-03-0

Solderless press-fit pin for plated through-hole  
Recommended drilled hole size: (1,28mm) .0505"

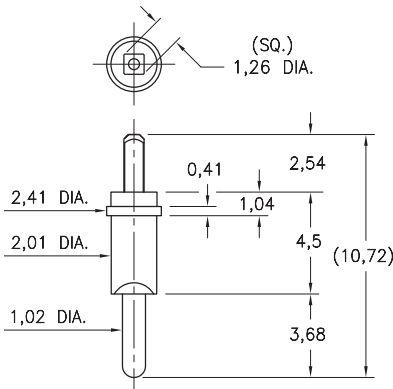

Recommended drilled hole sizes are prior to plating of the PCB and based on typical copper deposition of .5 - 1 oz. This results in a reduction of hole size by approximately 0,038 - 0,076. Depending on surface plating, typical finished hole sizes are 0,076 - 0,127 smaller than drilled hole sizes. The finished hole size tolerance for press-fit applications should be specified as +/- 0,051

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Except where noted ) \*

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: XXXX - 0 - 0X - XX - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27µm GOLD OVER NICKEL (RoHS)


# MALE PCB PINS

## PRINTED CIRCUIT PINS

### 5231

5231-0-00-XX-00-00-38-0


Swage mount in 2,39 hole  
For a 3,18 thick board



### 9092

9092-0-00-XX-00-00-38-0


Wire crimp termination up to 14 AWG



### 7310

7310-0-01-XX-00-00-08-0


Board edge press-fit



### 5066

5066-0-00-26-00-00-03-0


Press-fit in 1,09 mounting hole



### 7937

7937-0-00-15-00-00-03-0


Target contact, horizontal surface mount  
Also available on 16mm wide carrier tape:  
2,400 parts per 330mm reel.  
See page 224.3 for Tape & Reel details

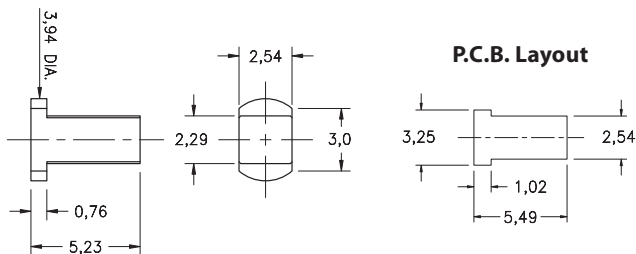


### 1502

1502-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole

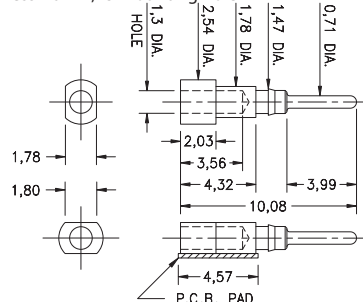


P.C.B. Layout




### 5102

5102-0-00-XX-00-00-33-0

Press-fit in 1,45 mounting hole

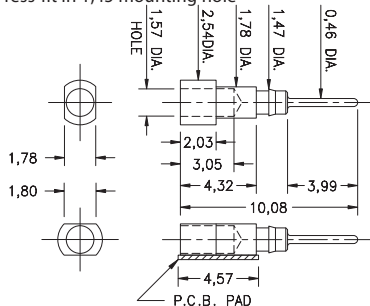


P.C.B. Layout




### 1508

1508-0-00-15-00-00-03-0

Test point, surface mount  
Also available on 16mm wide carrier tape:  
1,600 parts per 330mm reel.  
See page 224.4 for Tape & Reel details



P.C.B. Layout



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except swage pins which are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 0X - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08μm TIN/LEAD OVER NICKEL
- ◆ 80 5,08μm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25μm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51μm GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27μm GOLD OVER NICKEL (RoHS)





# MALE PCB PINS

## PINS ON TAPE & REEL PACKAGING

### 4825

4825-0-57-XX-00-00-33-0



Solder mount in 0,48 mounting hole  
16mm wide X 8mm pitch carrier tape:  
3,250 parts per 330mm reel.

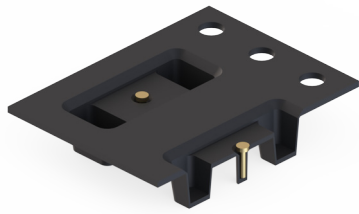

### 4288

4288-0-57-XX-00-00-33-0



Solder mount in 0,48 mounting hole  
16mm wide X 8mm pitch carrier tape:  
3,250 parts per 13" reel.

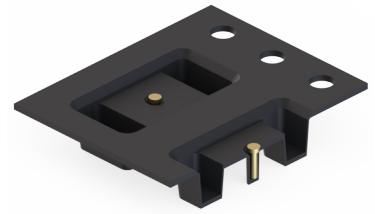

### 4353

4353-0-57-XX-00-00-33-0



Solder mount in 0,41 mounting hole  
16mm wide X 8mm pitch carrier tape:  
3,040 parts per 330mm reel.

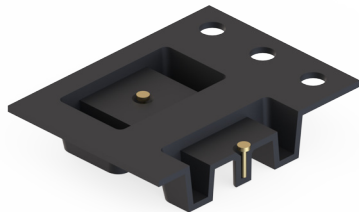

### 4068

4068-0-57-XX-00-00-33-0


Solder mount in 0,56 mounting hole  
16mm wide X 8mm pitch carrier tape:  
2,000 parts per 330mm reel.

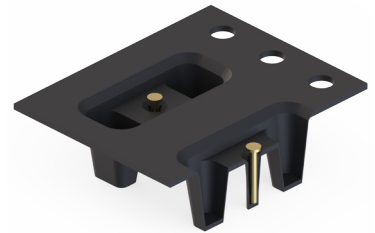

### 6547

6547-0-57-XX-00-00-33-0



Solder mount in 0,61 mounting hole  
24mm wide X 8mm pitch carrier tape:  
1,080 parts per 330mm reel.



### 9083

9083-0-57-XX-00-00-38-0

Solder mount in 0,41 mounting hole  
16mm wide X 8mm pitch carrier tape:  
1,950 parts per 330mm reel.

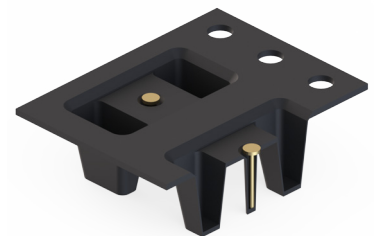

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Except where noted )

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - X - 00 - XX - 00 - 00 - XX - 0

**BASIC PART #** →

**SPECIFY PIN FINISH:**

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 34 1,27 $\mu$ m GOLD OVER NICKEL (RoHS)





# MALE PCB PINS

## PINS ON TAPE & REEL PACKAGING

### 9113

9113-0-57-XX-00-00-38-0



Solder mount in 0,56 mounting hole  
16mm wide X 8mm pitch carrier tape:  
1,800 parts per 330mm reel.

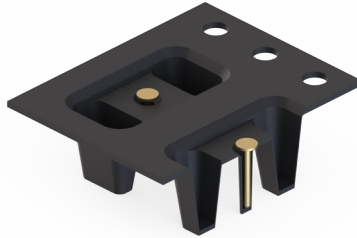

### 4361

4361-0-57-XX-00-00-33-0


Solder mount in 0,48 mounting hole  
16mm wide X 8mm pitch carrier tape:  
3,600 parts per 13" reel.

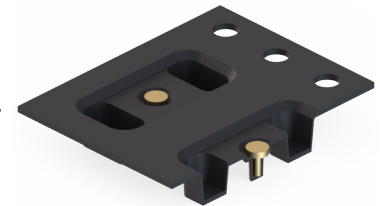

### 4477

4477-0-57-XX-00-00-33-0



Solder mount in 0,86 mounting hole  
24mm wide X 8mm pitch carrier tape:  
1,300 parts per 330mm reel.



### 3137

3137-1-57-XX-00-00-08-0



Solder mount in 1,09 mounting hole  
16mm wide X 12mm pitch carrier tape:  
580 parts per 330mm reel.

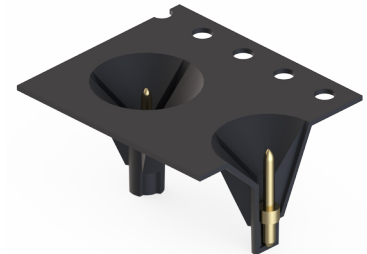

### 0286

0286-0-57-XX-00-00-03-0


Press-fit in 1,45 mounting hole  
16mm wide X 8mm pitch carrier tape:  
2,500 parts per 330mm reel.

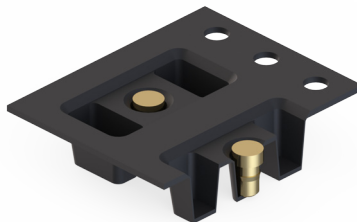

### 9265

9265-0-57-XX-00-00-38-0

Solder mount in 1,6 mounting hole  
16mm wide X 8mm pitch carrier tape:  
1,170 parts per 330mm reel.



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

◆ 15 0,25µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## 2381

2381-0-57-XX-00-00-33-0


Solder mount in 1,37 mounting hole  
16mm wide X 8mm pitch carrier tape:  
1,800 parts per 330mm reel.

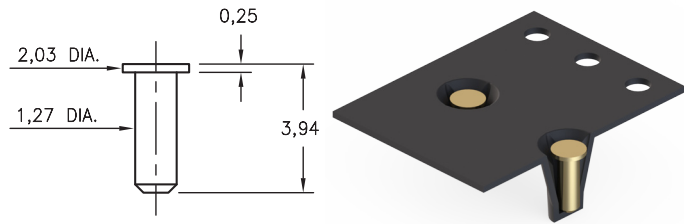

## 1508

1508-0-57-15-00-00-03-0


Test point, surface mount  
16mm wide X 8mm pitch carrier tape:  
1,600 parts per 330mm reel.

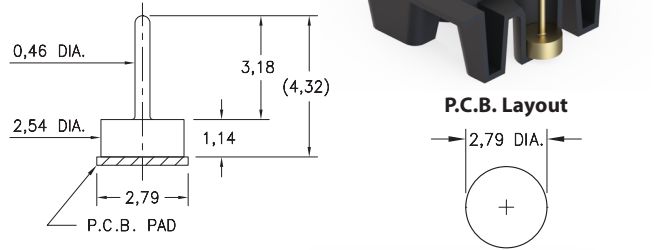

## 9022

9022-0-57-XX-00-00-33-0


Solder mount in 1,68 mounting hole  
24mm wide X 8mm pitch carrier tape:  
1,500 parts per 330mm reel.

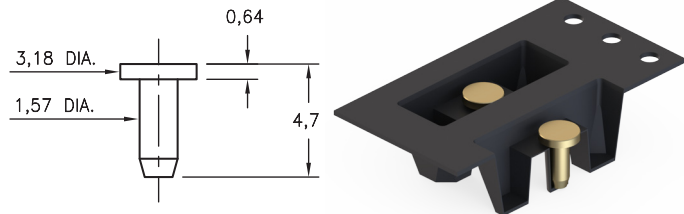

## 1944

1944-0-57-15-00-00-03-0


Flat face Target contact, surface mount  
16mm wide X 8mm pitch carrier tape:  
2,200 parts per 330mm reel.

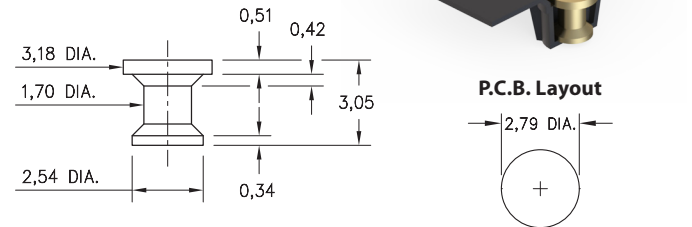

## 1943

1943-0-57-15-00-00-03-0


Concave face Target contact, surface mount  
16mm wide X 8mm pitch carrier tape:  
2,200 parts per 330mm reel.

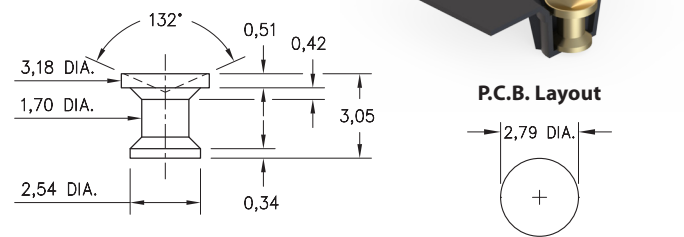

## 7937

7937-0-58-15-00-00-03-0

Target contact, horizontal surface mount  
16mm wide X 8mm pitch carrier tape:  
2,400 parts per 330mm reel.

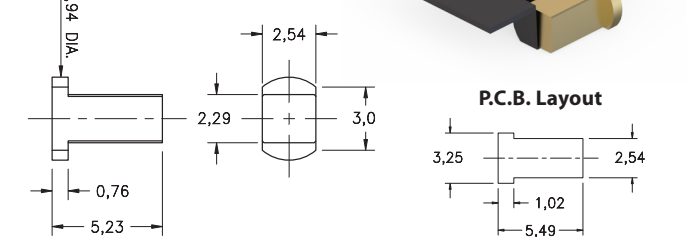

### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm .005$   
Diameters:  $\pm .002$   
Angles:  $\pm 2^\circ$



**ORDER CODE:** XXXX - X - 00 - XX - 00 - 00 - XX - 0

**BASIC PART #**

**SPECIFY PIN FINISH:**

- 01 200  $\mu$ " TIN/LEAD OVER NICKEL
- ◆ 80 200  $\mu$ " TIN OVER NICKEL (RoHS)
- ◆ 15 10  $\mu$ " GOLD OVER NICKEL (RoHS)
- ◆ 21 20  $\mu$ " GOLD OVER NICKEL (RoHS)
- ◆ 34 50  $\mu$ " GOLD OVER NICKEL (RoHS)





# MALE PCB PINS

## 8086

8086-0-57-XX-00-00-33-0


Solder mount in 2,01 mounting hole  
12mm wide X 8mm pitch carrier tape:  
550 parts per 330mm reel.



## 8086

8086-0-59-XX-00-00-33-0

Surface mount  
16mm wide X 8mm pitch carrier tape:  
330 parts per 330mm reel.



### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Except where noted )

**Dimensions:** Inches

**Tolerances On:** Lengths:  $\pm .005$   
Diameters:  $\pm .002$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

◆ 15  $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## WRAPOST TERMINALS

### 5275

5275-X-05-XX-00-00-01-0

Square press-fit in 0,89 plated through-hole




Basic Part Number	# of Wraps	Length A
5275-1	1	9,40
5275-2	2	11,94
5275-3	3	15,49

### 1010 ⇔ 1012/1020 ⇔ 1022

10XX-X-05-XX-00-00-01-0

Press-fit in 1,45 mounting hole




Basic Part Number	# of Wraps	Wrapost Length A	Head Dia. C
1012-1	1	6,60	1,83
1011-2	2	9,14	
1010-3	3	12,7	
1022-1	1	6,60	1,57
1021-2	2	9,14	
1020-3	3	12,7	

### 1215

1215-3-05-XX-00-00-01-0


Press-fit in 1,09 mounting hole



### 1124

1124-0-05-XX-00-00-01-0


Press-fit in 1,09 mounting hole



### 1210

1210-0-05-XX-00-00-01-0


Press-fit in 1,35 mounting hole



### 1222

1222-0-05-XX-00-00-01-0


Press-fit in 1,40 mounting hole



### 1221

1221-0-05-XX-00-00-01-0


Press-fit in 1,42 mounting hole



### 1110

1110-3-05-XX-00-00-01-0


Press-fit in 1,45 mounting hole



### 1094

1094-0-05-XX-00-00-01-0

Press-fit in 1,42 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: **XXXX - X - 05 - XX - 00 - 00 - 01 - 0**

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## WRAPOST TERMINALS

### 1030 → 1032

103X-X-05-XX-00-00-01-0

Press-fit in 1,45 mounting hole




Basic Part Number	# of Wraps	Length A
1032-1	1	6,60
1031-2	2	9,14
1030-3	3	12,7

### 1216

1216-0-05-XX-00-00-01-0

Press-fit in 1,42 mounting hole




### 1095

1095-0-05-XX-00-00-01-0

Swage mount in 2,39 hole


For a 1,57 thick board



### 1214

1214-0-05-XX-00-00-01-0


Press-fit in 1,50 mounting hole



### 1212

1212-0-05-XX-00-00-01-0


Press-fit in 1,55 mounting hole



### 1213

1213-0-05-XX-00-00-01-0


Press-fit in 1,55 mounting hole



### 0318

0318-3-05-XX-00-00-01-0


Press-fit in 1,45 mounting hole



### 1302

1302-0-05-XX-00-00-01-0

Press-fit in 1,45 mounting hole




### 1097

1097-0-05-XX-00-00-01-0

Swage mount in 2,39 hole

For a 1,57 thick board



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
( Except swage pins which are annealed )

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: **XXXX - X - 05 - XX - 00 - 00 - 01 - 0**

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)





# MALE PCB PINS


## WRAPOST TERMINALS

### 8301

**8301-X-24-XX-00-00-01-0**

Press-fit in 1,45 mounting hole

For wire sizes up to 22 AWG




Basic Part Number	# of Wraps	Length A
<b>8301-2</b>	2	9,40
<b>8301-3</b>	3	12,95

### 1083

**1083-0-05-XX-00-00-01-0**


Press-fit in 1,50 mounting hole



### 5301

**5301-0-05-XX-00-00-01-0**


Press-fit in 1,45 mounting hole



### 1090

**1090-0-05-XX-00-00-01-0**


Press-fit in 1,50 mounting hole



### 8608

**8608-0-05-XX-00-00-01-0**

Press-fit in 1,42 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - XX - XX - 00 - 00 - 01 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 15 0,25 $\mu$ m GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51 $\mu$ m GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## WRAPOST TERMINALS

### 1096

1096-X-05-XX-00-00-01-0

Press-fit in 1,45 mounting hole




Basic Part Number	# of Wraps	Length A
1096-2	2	9,68
1096-3	3	13,39

### 1106

1106-X-23-XX-00-00-01-0

Press-fit in 1,45 mounting hole




Basic Part Number	# of Wraps	Length A
1106-2	2	9,40
1106-3	3	12,95

### 1093

1093-0-05-XX-00-00-01-0


Press-fit in 1,42 mounting hole



### 0730

0730-3-05-XX-00-00-01-0


Press-fit in 1,45 mounting hole



### 1122

1122-0-22-XX-00-00-01-0


Press-fit in 1,35 mounting hole



### 1064

1064-0-23-XX-00-00-01-0


Press-fit in 1,42 mounting hole



### 1092

1092-0-05-XX-00-00-01-0


Press-fit in 1,42 mounting hole



### 1068

1068-0-23-XX-00-00-01-0


Press-fit in 1,45 mounting hole



### 1070 → 1072

107X-X-23-XX-00-00-01-0

Press-fit in 1,45 mounting hole



Basic Part Number	# of Wraps	Length A
1072-1	1	6,60
1071-2	2	9,40
1070-3	3	12,95

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Except where noted)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ±0,13  
Diameters: ±0,051  
Angles: ±2°



ORDER CODE: XXXX - X - XX - XX - 00 - 00 - 01 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 21 0,51µm GOLD OVER NICKEL (RoHS)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2111

2111-X-00-XX-00-00-07-0

Swage mount in 0,84 hole




Basic Part Number	Board Thickness	Length V
2111-1	0,79	1,35
2111-2	1,57	2,13
2111-3	2,39	2,92

### 2113

2113-X-00-XX-00-00-07-0

Swage mount in 1,09 hole




Basic Part Number	Board Thickness	Length V
2113-1	0,79	1,35
2113-2	1,57	2,13
2113-3	2,39	2,92
2113-4	3,18	3,73

### 2108

2108-X-00-XX-00-00-07-0

Swage mount in 1,09 hole




Basic Part Number	Board Thickness	Length V
2108-1	0,79	1,35
2108-2	1,57	2,13
2108-3	2,39	2,92
2108-4	3,18	3,73

### 2102

2102-X-00-XX-00-00-07-0

Swage mount in 1,32 hole




Basic Part Number	Board Thickness	Length V
2102-5	0,41	0,89
2102-1	0,79	1,37
2102-2	1,57	2,13
2102-3	2,39	2,92
2102-4	3,18	3,73

### 2109

2109-X-00-XX-00-00-07-0

Swage mount in 1,32 hole




Basic Part Number	Board Thickness	Length V
2109-1	0,79	1,32
2109-2	1,57	2,16

### 2324

2324-2-00-XX-00-00-07-0

Swage mount in 1,32 hole

For a 1,57 thick board



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2312

2312-X-00-XX-00-00-07-0

Swage mount in 1,63 hole




Basic Part Number	Board Thickness	Length V
2312-1	0,79	1,35
2312-2	1,57	2,39
2312-3	2,39	2,92
2312-4	3,18	3,73

### 2308

2308-X-00-XX-00-00-07-0

Swage mount in 1,63 hole




Basic Part Number	Board Thickness	Length V	Depth D
2308-1	0,79	1,37	0,91
2308-2	1,57	2,13	1,68
2308-3	2,39	2,92	2,44
2308-4	3,18	3,73	3,20

### 2707

2707-X-00-XX-00-00-07-0

Swage mount in 3,05 hole




Basic Part Number	Board Thickness	Length V
2707-1	0,79	1,57
2707-2	1,57	2,39
2707-3	2,39	3,18
2707-4	3,18	3,96

### 2329

2329-X-00-XX-00-00-07-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V	Depth D
2329-1	0,79	1,14	1,14
2329-2	1,57	2,39	1,57
2329-3	2,39	3,18	1,57
2329-4	3,18	3,96	1,57

### 2510

2510-X-00-XX-00-00-07-0


Swage mount in 1,63 hole



### 2513

2513-X-00-XX-00-00-07-0

Swage mount in 1,63 hole



Basic Part Number	Board Thickness	Length V
251X-1	0,79	1,57
251X-2	1,57	2,39
251X-3	2,39	3,18
251X-4	3,18	3,96

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2110

2110-X-00-XX-00-00-07-0

Swage mount in 1,32 hole




Basic Part Number	Board Thickness	Length V
2110-1	0,79	1,24
2110-2	1,57	2,08

### 2333

2333-X-00-XX-00-00-07-0

Press-fit & swage in 1,32 mounting hole




Basic Part Number	Board Thickness	Length V
2333-1	1,98	2,62
2333-2	1,57	2,21
2333-3	1,19	1,83

### 2821

2821-X-00-XX-00-00-07-0

Swage mount in 3,18 hole




Basic Part Number	Board Thickness	Length V
2821-2	1,57	2,77
2821-3	2,39	3,58
2821-4	3,18	4,37

### 2533

2533-0-00-XX-00-00-07-0


Press-fit & swage in 1,32 mounting hole  
For a 1,57 to 2,39 thick board



### 2101

2101-3-00-XX-00-00-07-0


Press-fit in 1,35 mounting hole  
For a 1,57 to 2,39 thick board



### 2316

2316-X-00-XX-00-00-07-0


Swage mount in 1,63 hole



### 2317

2317-X-00-XX-00-00-07-0


Swage mount in 1,63 hole



### 2708

2708-X-00-XX-00-00-07-0

Swage mount in 3,05 hole



Basic Part Number	Board Thickness	Length V
2XXX-1	0,79	1,57
2XXX-2	1,57	2,39
2XXX-3	2,39	3,18
2XXX-4	3,18	3,96

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: **XXXX - X - 00 - XX - 00 - 00 - 07 - 0**

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 44 7,62µm SILVER OVER COPPER (RoHS)
- 50 7,62µm ELECTRO-SOLDER (60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2348

2348-X-00-XX-00-00-07-0


Swage mount in 1,63 hole



### 2301

2301-X-00-XX-00-00-07-0


Swage mount in 1,70 hole



### 2506

2506-X-00-XX-00-00-07-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V
2XXX-1	0,79	1,35
2XXX-2	1,57	2,13
2XXX-3	2,39	2,92
2XXX-4	3,18	3,73

### 2310

2310-X-00-XX-00-00-07-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V
2310-1	0,79	1,35
2310-2	1,57	2,08
2310-3	2,39	2,87
2310-4	3,18	3,68

### 2505

2505-X-00-XX-00-00-07-0

Swage mount in 1,93 hole




Basic Part Number	Board Thickness	Length V
2505-1	0,79	1,57
2505-2	1,57	2,36
2505-3	2,39	3,18
2505-4	3,18	3,96

### 2325

2325-X-00-XX-00-00-07-0


Swage mount in 1,85 hole



### 2355

2355-X-00-XX-00-00-07-0


Swage mount in 1,85 hole



### 2365

2365-X-00-XX-00-00-07-0

Swage mount in 1,93 hole



Basic Part Number	Board Thickness	Length V
23X5-1	0,79	1,35
23X5-2	1,57	2,13
23X5-3	2,39	2,92
23X5-4	3,18	3,73

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2304

2304-X-00-XX-00-00-07-0


Swage mount in 1,93 hole



### 2305

2305-X-00-XX-00-00-07-0

Swage mount in 1,93 hole




Basic Part Number	Board Thickness	Length V
230X-1	0,79	1,30
230X-2	1,57	2,08
230X-3	2,39	2,87
230X-4	3,18	3,68

### 2503

2503-X-00-XX-00-00-07-0

Swage mount in 2,08 hole




Basic Part Number	Board Thickness	Length V	Depth D
2503-1	0,79	1,98	1,72
2503-2	1,57	2,77	2,49
2503-3	2,39	3,58	2,49
2503-4	3,18	4,39	2,49

### 2704

2704-X-00-XX-00-00-07-0

Swage mount in 2,08 hole




Basic Part Number	Board Thickness	Length V
2704-1	0,79	1,91
2704-2	1,57	2,67
2704-3	2,39	3,43
2704-4	3,18	4,19

### 2306

2306-X-00-XX-00-00-07-0


Swage mount in 1,93 hole



### 2307

2307-X-00-XX-00-00-07-0


Swage mount in 1,93 hole



### 2311

2311-X-00-XX-00-00-07-0

Swage mount in 1,93 hole



Basic Part Number	Board Thickness	Length V
23XX-1	0,79	1,30
23XX-2	1,57	2,08
23XX-3	2,39	2,87
23XX-4	3,18	3,68

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 44 7,62µm SILVER OVER COPPER (RoHS)
- 50 7,62µm ELECTRO-SOLDER (60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2810

2810-X-00-XX-00-00-07-0

Swage mount in 3,0 hole




Basic Part Number	Board Thickness	Length V
2810-2	1,57	2,67
2810-3	2,39	3,43
2810-4	3,18	4,19

### 2524

2524-X-00-XX-00-00-07-0

Swage mount in 2,34 hole




Basic Part Number	Board Thickness	Length V
2524-1	0,79	1,91
2524-2	1,57	2,67
2524-3	2,39	3,43
2524-4	3,18	4,19

### 2561

2561-X-00-XX-00-00-07-0


Swage mount in 2,39 hole



### 2508

2508-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V	Depth D
25XX-1	0,79	1,60	1,19
25XX-2	1,57	2,39	1,57
25XX-3	2,39	3,18	1,57
25XX-4	3,18	3,96	1,57

### 2551

2551-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
2551-1	0,79	1,91
2551-2	1,57	2,67
2551-3	2,39	3,43
2551-4	3,18	4,19

### 2812

2812-X-00-XX-00-00-07-0

Swage mount in 2,95 hole



Basic Part Number	Board Thickness	Length V
2812-1	1,57	2,67
2812-2	2,39	3,43
2812-3	3,18	4,19
2812-4	4,78	5,84

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)






# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2501

2501-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
2501-1	0,79	1,98
2501-2	1,57	2,77
2501-3	2,39	3,56
2501-4	3,18	4,34

### 2703

2703-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
2703-1	0,79	1,96
2703-2	1,57	2,72
2703-3	2,39	3,48
2703-4	3,18	4,24

### 2702

2702-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V	Depth D
2702-1	0,79	1,91	1,60
2702-2	1,57	2,67	2,36
2702-3	2,39	3,43	2,36
2702-4	3,18	4,19	2,36

### 2710

2710-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
2710-1	0,79	1,57
2710-2	1,57	2,39
2710-3	2,39	3,18
2710-4	3,18	3,96

### 2717

2717-X-00-XX-00-00-07-0


Swage mount in 2,39 hole



### 2713

2713-X-00-XX-00-00-07-0

Swage mount in 2,39 hole



Basic Part Number	Board Thickness	Length V
271X-1	0,79	1,57
271X-2	1,57	2,39
271X-3	2,39	3,18
271X-4	3,18	3,96

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08μm TIN/LEAD OVER NICKEL
- ◆ 80 5,08μm TIN OVER NICKEL (RoHS)
- ◆ 44 7,62μm SILVER OVER COPPER (RoHS)
- 50 7,62μm ELECTRO-SOLDER (60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2512

2512-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
<b>2512-1</b>	0,79	1,57
<b>2512-2</b>	1,57	2,39
<b>2512-3</b>	2,39	3,18
<b>2512-4</b>	3,18	3,96

### 2705

2705-X-00-XX-00-00-07-0

Swage mount in 3,28 hole




Basic Part Number	Board Thickness	Length V
<b>2705-1</b>	0,79	1,91
<b>2705-2</b>	1,57	2,67
<b>2705-3</b>	2,39	3,43
<b>2705-4</b>	3,18	4,19

### 2803

2803-X-00-XX-00-00-07-0

Swage mount in 2,87 hole




Basic Part Number	Board Thickness	Length V
<b>2803-1</b>	0,79	1,98
<b>2803-2</b>	1,57	2,77
<b>2803-3</b>	2,39	3,56
<b>2803-4</b>	3,18	4,34

### 2815

2815-X-00-XX-00-00-07-0

Swage mount in 2,87 hole




Basic Part Number	Board Thickness	Length V
<b>2815-1</b>	0,79	1,91
<b>2815-2</b>	1,57	2,67
<b>2815-3</b>	2,39	3,43
<b>2815-4</b>	3,18	4,19

### 2816

2816-X-00-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V
<b>2816-1</b>	0,79	1,98
<b>2816-2</b>	1,57	2,77
<b>2816-3</b>	2,39	3,58
<b>2816-4</b>	3,18	4,37

### 2817

2817-X-00-XX-00-00-07-0

Swage mount in 2,95 hole



Basic Part Number	Board Thickness	Length V
<b>2817-1</b>	0,79	1,91
<b>2817-2</b>	1,57	2,67
<b>2817-3</b>	2,39	3,43
<b>2817-4</b>	3,18	4,19

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: **XXXX - X - 00 - XX - 00 - 00 - 07 - 0**

BASIC PART #

SPECIFY PIN FINISH:

- 01** 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- 80** 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- 44** 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50** 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINAL TURRETS

### 2802

2802-X-00-XX-00-00-07-0


Swage mount in 3,0 hole



### 2804

2804-X-00-XX-00-00-07-0

Swage mount in 3,0 hole




Basic Part Number	Board Thickness	Length V
280X-1	0,79	1,98
280X-2	1,57	2,77
280X-3	2,39	3,56
280X-4	3,18	4,34

### 2805

2805-X-00-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V	Depth D
2805-1	0,79	1,88	1,73
2805-2	1,57	2,67	2,49
2805-3	2,39	3,43	2,49
2805-4	3,18	4,19	2,49

### 2801

2801-X-00-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V
2801-1	0,79	1,98
2801-2	1,57	2,77
2801-3	2,39	3,58
2801-4	3,18	4,37
2801-5	4,76	5,94

### 2806

2806-X-00-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V
2806-1	0,79	1,98
2806-2	1,57	2,77
2806-3	2,39	3,58
2806-4	3,18	4,37

### 2811

2811-X-00-XX-00-00-07-0

Swage mount in 2,95 hole



Basic Part Number	Board Thickness	Length V
2811-1	0,79	1,91
2811-2	1,57	2,67
2811-3	2,39	3,43
2811-4	3,18	4,19

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER (60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINALS SLOTTED

### 2104

2104-X-01-XX-00-00-07-0

Swage mount in 0,91 hole




Basic Part Number	Board Thickness	Length V
2104-1	0,79	1,40
2104-2	1,57	2,18
2104-3	2,39	2,97
2104-4	3,18	3,76

### 2112

2112-X-01-XX-00-00-07-0

Swage mount in 1,09 hole




Basic Part Number	Board Thickness	Length V
2112-5	0,41	0,94
2112-1	0,79	1,35
2112-2	1,57	2,13
2112-3	2,39	2,92
2112-4	3,18	3,73

### 2105

2105-X-01-XX-00-00-07-0

Swage mount in 1,32 hole




Basic Part Number	Board Thickness	Length V
2105-1	0,79	1,40
2105-2	1,57	2,18
2105-3	2,39	2,97
2105-4	3,18	3,78

### 2103

2103-X-01-XX-00-00-07-0

Swage mount in 1,32 hole




Basic Part Number	Board Thickness	Length V
2103-1	0,79	1,4
2103-2	1,57	2,18
2103-3	2,39	2,97
2103-4	3,18	3,78

### 2106

2106-X-01-XX-00-00-07-0


Swage mount in 1,32 hole



### 2107

2107-X-01-XX-00-00-07-0

Swage mount in 1,32 hole



Basic Part Number	Board Thickness	Length V
210X-1	0,79	1,30
210X-2	1,57	2,08
210X-3	2,39	2,87
210X-4	3,18	3,68

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 01 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINALS SLOTTED

### 2303

2303-X-01-XX-00-00-07-0


Swage mount in 1,63 hole



### 2323

2323-X-01-XX-00-00-07-0


Swage mount in 1,63 hole



### 2322

2322-X-01-XX-00-00-07-0

Swage mount in 1,63 hole




Basic Part Number	Board Thickness	Length V
23XX-1	0,79	1,35
23XX-2	1,57	2,13
23XX-3	2,39	2,92
23XX-4	3,18	3,73

### 2320

2320-X-01-XX-00-00-07-0

Swage mount in 1,63 hole




Basic Part Number	Board Thickness	Length V
2320-1	0,79	1,35
2320-2	1,57	2,13
2320-3	2,39	2,92

### 2328

2328-X-01-XX-00-00-07-0

Swage mount in 1,63 hole




Basic Part Number	Board Thickness	Length V
2328-1	0,79	1,57
2328-2	1,57	2,39
2328-3	2,39	3,18
2328-4	3,18	3,96

### 2520

2520-X-01-XX-00-00-07-0


Swage mount in 1,63 hole



### 2517

2517-X-01-XX-00-00-07-0

Swage mount in 1,63 hole



Basic Part Number	Board Thickness	Length V
25XX-1	0,79	1,57
25XX-2	1,57	2,39
25XX-3	2,39	3,18
25XX-4	3,18	3,96

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 01 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:





- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)



# WIRE TERMINATION

## LOOSE PINS, RECEPTACLES AND SPRING PINS

Mill-Max manufactures many different types of pins and receptacles for terminating wires. There are solder cup and crimp barrel styles for terminating discrete wires to boards, making up cable assemblies or converting device wires to pluggable pins. We have slotted and turret styles for connecting power and ground wires or for test and jumper applications. Wrapost termination styles are also available for prototyping and test. Along with our wide selection of standard products, custom designs are available by contacting Mill-Max Technical Services.

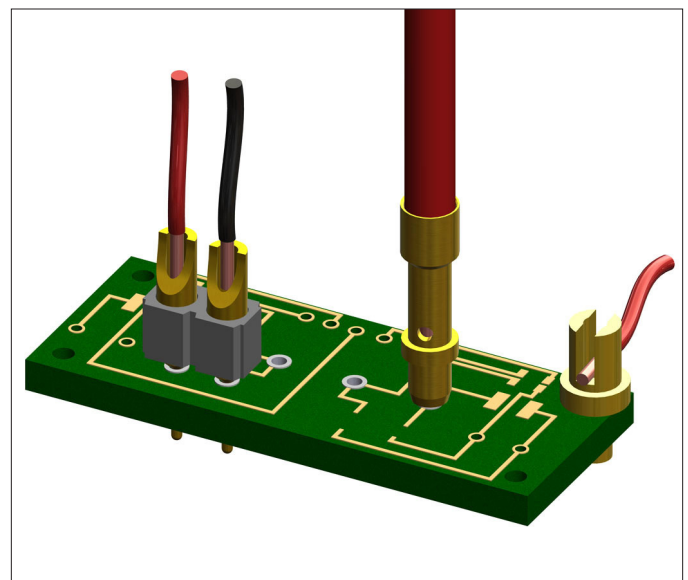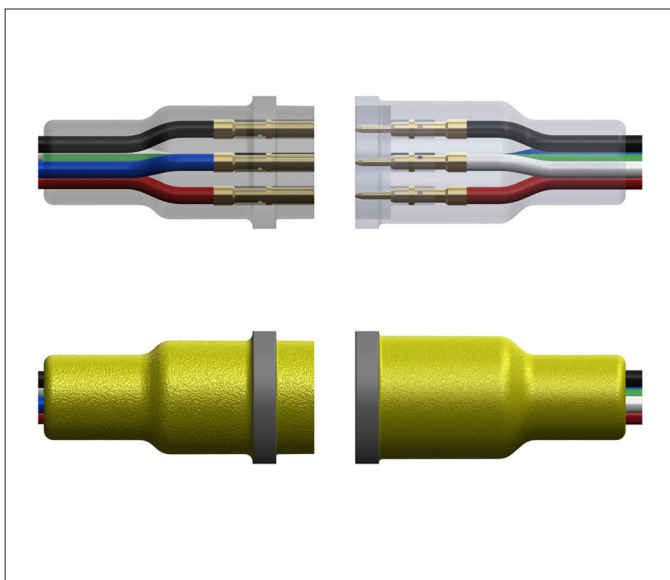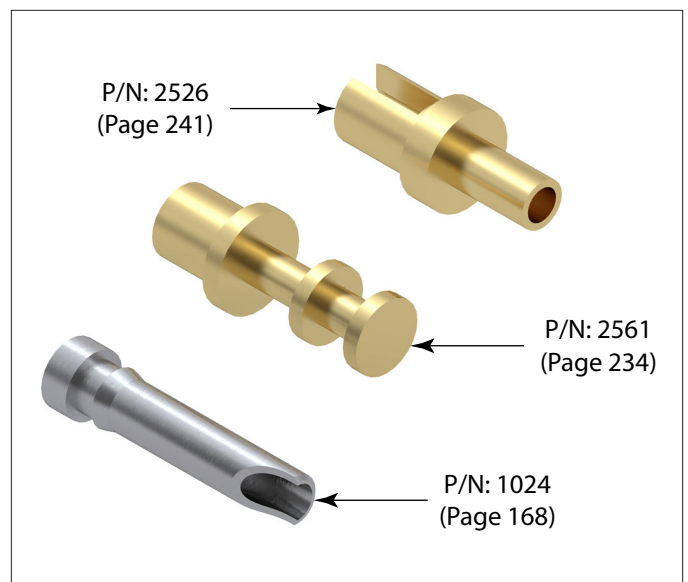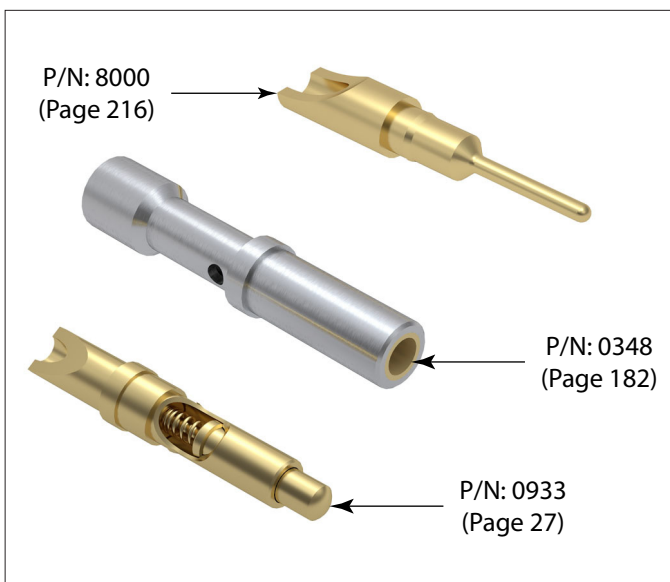


# MALE PCB PINS

## SOLDER TERMINALS SLOTTED

### 2315

2315-X-01-XX-00-00-07-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V	Depth D
2315-1	0,79	1,14	1,02
2315-2	1,57	2,39	1,57
2315-3	2,39	3,18	1,57
2315-4	3,18	3,96	1,57

### 2302

2302-X-01-XX-00-00-07-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V
2302-1	0,79	1,35
2302-2	1,57	2,13
2302-3	2,39	2,92
2302-4	3,18	3,73

### 2352

2352-X-01-XX-00-00-07-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V
2352-1	0,79	1,14
2352-2	1,57	2,39
2352-3	2,39	3,18
2352-4	3,18	3,96

### 2362

2362-X-01-XX-00-00-07-0

Swage mount in 1,70 hole




Basic Part Number	Board Thickness	Length V
2362-5	0,41	0,94
2362-1	0,79	1,35
2362-2	1,57	2,13
2362-3	2,39	2,92
2362-4	3,18	3,73

### 2507

2507-X-01-XX-00-00-07-0


Swage mount in 1,70 hole



### 2526

2526-X-01-XX-00-00-07-0

Swage mount in 1,63 hole



Basic Part Number	Board Thickness	Length V
25XX-1	0,79	1,35
25XX-2	1,57	2,13
25XX-3	2,39	2,92
25XX-4	3,18	3,73

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 01 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINALS SLOTTED

### 2314

2314-X-01-XX-00-00-07-0

Swage mount in 1,93 hole




Basic Part Number	Board Thickness	Length V
2314-1	0,79	1,14
2314-2	1,57	2,39
2314-3	2,39	3,18
2314-4	3,18	3,96

### 2511

2511-X-01-XX-00-00-07-0

Swage mount in 1,93 hole




Basic Part Number	Board Thickness	Length V
2511-1	0,79	1,60
2511-2	1,57	2,39
2511-3	2,39	3,18
2511-4	3,18	3,96

### 2515

2515-X-01-XX-00-00-07-0


Swage mount in 2,39 hole



### 2516

2516-X-01-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
251X-1	0,79	1,91
251X-2	1,57	2,67
251X-3	2,39	3,43
251X-4	3,18	3,73

### 2502

2502-X-01-XX-00-00-07-0

Swage mount in 2,39 hole



Basic Part Number	Board Thickness	Length V
2502-1	0,79	2,03
2502-2	1,57	2,82
2502-3	2,39	3,63
2502-4	3,18	4,42

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 01 - XX - 00 - 00 - 07 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)






# MALE PCB PINS

## SOLDER TERMINALS SLOTTED

### 2715

2715-X-01-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V
2715-2	1,57	2,77
2715-3	2,39	3,58
2715-4	3,18	4,37

### 2809

2809-X-01-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V	Depth D
2809-1	0,79	1,98	1,73
2809-2	1,57	2,76	2,49
2809-3	2,39	3,58	2,49
2809-4	3,18	4,36	2,49

### 2701

2701-X-01-XX-00-00-07-0


Swage mount in 2,95 hole



### 2808

2808-X-01-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V
2XXX-1	0,79	1,91
2XXX-2	1,57	2,67
2XXX-3	2,39	3,43
2XXX-4	3,18	4,19

### 2762

2762-4-01-XX-00-00-07-0


Swage mount in 2,95 hole  
For a 3,18 thick board



### 2807

2807-X-01-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V
2807-1	0,79	1,98
2807-2	1,57	2,77
2807-3	2,39	3,56
2807-4	3,18	4,34

### 3622

3622-0-32-15-00-00-03-0

Slotted compliant tail press-fit in 1,02 ± 0,08 plated hole. For 1,52 → 2,54 thick board

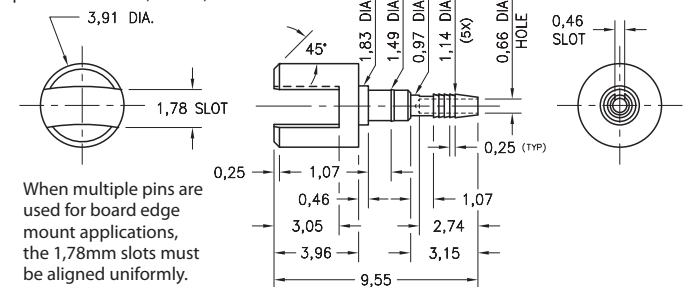

When multiple pins are used for board edge mount applications, the 1,78mm slots must be aligned uniformly.

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths: ± 0,13  
Diameters: ± 0,051  
Angles: ± 2°



ORDER CODE: **XXXX - X - XX - XX - 00 - 00 - 07 - 0**

BASIC PART #

SPECIFY PIN FINISH:

Part #3622 plating ONLY

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◆ 15 0,25µm GOLD OVER NICKEL (RoHS)
- ◆ 80 5,08µm TIN OVER NICKEL (RoHS)
- ◆ 44 7,62µm SILVER OVER COPPER (RoHS)
- 50 7,62µm ELECTRO-SOLDER (60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINALS VARIOUS TYPES

### 2709

2709-X-07-XX-00-00-07-0

Swage mount in 2,95 hole




Basic Part Number	Board Thickness	Length V	Length A
2709-2	1,57	2,77	7,14
2709-3	2,39	3,58	6,35

### 2115

2115-2-00-XX-00-00-07-0


Swage mount in 1,09 hole  
For a 1,57 thick board



### 2326

2326-2-00-XX-00-00-07-0


Swage mount in 1,40 hole  
For a 1,57 thick board



### 6430

6430-0-00-XX-00-00-03-0


Press-fit in 0,64 mounting hole



### 5731

5731-0-00-XX-00-00-03-0


Press-fit in .056 mounting hole



### 8831

8831-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 0995

0995-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 8835

8835-0-00-XX-00-00-03-0


Press-fit in 1,45 mounting hole



### 5130

5130-0-00-XX-00-00-03-0

Press-fit in .056 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - XX - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINALS PIN TYPE

### 2318

2318-X-00-XX-00-00-07-0

Swage mount in 1,57 hole




Basic Part Number	Board Thickness	Length V
2318-1	0,79	1,30
2318-2	1,57	2,08
2318-3	2,39	2,87

### 2309

2309-X-00-XX-00-00-07-0

Swage mount in 1,63 hole




Basic Part Number	Board Thickness	Length V
2309-1	0,79	1,37
2309-2	1,57	2,13
2309-3	2,39	2,92
2309-4	3,18	3,73

### 2514

2514-2-00-XX-00-00-07-0


Press-fit in 1,78 mounting hole



### 8602

8602-1-00-XX-00-00-07-0


Square press-fit in 0,81 plated through-hole



### 3050

3050-X-01-XX-00-00-03-0

Press-fit in 0,81 mounting hole  
For wire sizes up to 26 AWG




Basic Part Number	Pin Length A
3050-0	7,7
3050-3	9,55

### 8250

8250-0-00-XX-00-00-03-0


Press-fit in 0,86 mounting hole



### 9994

9994-0-00-XX-00-00-03-0


Press-fit in 0,84 mounting hole



### 9067

9067-0-00-XX-00-00-03-0

Press-fit in 1,4 mounting hole



#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: **XXXX - X - 00 - XX - 00 - 00 - 07 - 0**

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)




# MALE PCB PINS

## SOLDER TERMINALS PIN TYPE

### 2319

2319-X-00-XX-00-00-07-0

Swage mount in 1,93 hole




Basic Part Number	Board Thickness	Length V
2319-1	0,79	1,30
2319-2	1,57	2,08
2319-3	2,39	2,87

### 2313

2313-X-00-XX-00-00-07-0

Swage mount in 1,93 hole




Basic Part Number	Board Thickness	Length V
2313-1	0,79	1,30
2313-2	1,57	2,13
2313-3	2,39	2,87
2313-4	3,18	3,68

### 2321

2321-X-00-XX-00-00-07-0

Swage mount in 1,93 hole




Basic Part Number	Board Thickness	Length V
2321-1	0,79	1,30
2321-2	1,57	2,08
2321-3	2,39	2,87
2321-4	3,18	3,68

### 2706

2706-X-00-XX-00-00-07-0

Swage mount in 3,05 hole




Basic Part Number	Board Thickness	Length V
2706-1	0,79	1,60
2706-2	1,57	2,36
2706-3	2,39	3,18
2706-4	3,18	3,96

### 2530

2530-X-00-XX-00-00-07-0

Swage mount in 2,39 hole




Basic Part Number	Board Thickness	Length V
2530-2	1,57	2,39
2530-3	2,39	3,18
2530-4	3,18	3,96

### 3156

3156-X-00-XX-00-00-08-0

Swage mount in 1,93 hole



Basic Part Number	Board Thickness	Length V
3156-1	0,79	1,30
3156-2	1,57	2,08
3156-3	2,39	2,87
3156-4	3,18	3,68

#### SPECIFICATIONS:

**Pin Material:** Brass Alloy 360, 1/2 Hard  
(Swage pins are annealed)

**Dimensions:** Millimeters

**Tolerances On:** Lengths:  $\pm 0,13$   
Diameters:  $\pm 0,051$   
Angles:  $\pm 2^\circ$



ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - XX - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 $\mu$ m TIN/LEAD OVER NICKEL
- ◆ 80 5,08 $\mu$ m TIN OVER NICKEL (RoHS)
- ◆ 44 7,62 $\mu$ m SILVER OVER COPPER (RoHS)
- 50 7,62 $\mu$ m ELECTRO-SOLDER  
(60/40 SnPb)

